



OFL Size 1 LED Flood Luminaire



Catalog
Number


Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

| | |
|----------------|--|
| EPA: | 0.6 ft ² (.06 m ²) |
| Depth: | 8.3" (21.1 cm) |
| Width: | 7" (18 cm) |
| Height: | 6.9" (17.4 cm) |
| Weight: | 5 lbs (2.27 kg) |

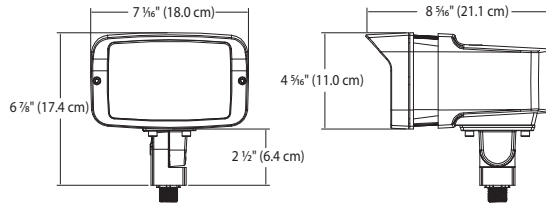

Introduction

The OFL Size 1 Floodlight delivers up to 4,400 lumens, with a robust design and several mounting options making it perfect for light commercial applications. It's the ideal long-life replacement for 70-150W metal halide floods, with typical energy savings up to 84% and expected service life of over 50,000 hours.

Ordering Information

EXAMPLE: OFL1 LED P1 40K MVOLT THK DDBXD

| OFL1 LED | | | | | | | |
|----------|---------------------|-------------------|-------|--------------------|----------|-------------------------------------|-------------------|
| Series | Performance Package | Color Temperature | | Voltage | Mounting | | Finish (required) |
| OFL1 LED | P1 | 40K | 4000K | MVOLT ¹ | THK | Knuckle with 1/2" NPS threaded pipe | DDBXD Dark bronze |
| | P2 | 50K | 5000K | | YK | Yoke | |

Accessories

Ordered and shipped separately.

| | |
|------------|------------------------------------|
| OFL1WG | Wire Guard Accessory |
| OFL1VG | Vandal Guard Accessory |
| DSXF1/2 TS | Slipfitter attachment ² |

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60Hz).
- Only available with OFL LED P1. It will only work on the knuckle mount.

FEATURES & SPECIFICATIONS

INTENDED USE

The traditional and robust design of the OFL1 LED floodlight with energy efficient LEDs, is suitable for replacing up to 150W Metal Halide. It is ideal for landscape, signage, and accent lighting in heavy commercial and residential applications.

CONSTRUCTION

Die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (0.6 ft²) for optimized wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering.

ELECTRICAL

Light engine(s) consist of chip-on-board (COB) LEDs directly coupled to the housing to maximize heat dissipation and promote long life (50,000 hrs).

INSTALLATION

Integral adjustable knuckle with 1/2-14NPS threaded pipe, yoke, or slipfitter attachment, facilitates quick and easy installation to a variety of mounting accessories.

LISTINGS

UL certified to U.S. and Canadian standards. Luminaire is IP65 rated. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Performance Package | System Watts | Dist. Type | Field Angle | | Beam Angle | | 40K | | 50K | |
|---------------------|--------------|------------|-------------|-----|------------|----|--------|-----|--------|-----|
| | | | "H | "V | "H | "V | Lumens | LPW | Lumens | LPW |
| P1 | 21W | WFL | 106 | 106 | 71 | 72 | 2,295 | 109 | 2,333 | 111 |
| P2 | 45W | WFL | 106 | 106 | 71 | 72 | 4,451 | 99 | 4,466 | 99 |

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient | Lumen Multiplier |
|---------|------------------|
| 0°C | 1.06 |
| 10°C | 1.03 |
| 20°C | 1.01 |
| 25°C | 1.00 |
| 30°C | 0.99 |
| 40°C | 0.97 |

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **OFL Flood Size 1** platform based on 9000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | 0 | 25,000 | 50,000 |
|--------------------------|---|--------|--------|
| Lumen Maintenance Factor | 1 | 0.88 | 0.78 |

Electrical Load

| Power Package | System Watts | Current (A) | | | | |
|---------------|--------------|-------------|------|------|------|------|
| | | 120V | 208V | 240V | 277V | 347V |
| P1 | 21W | 0.21 | 0.12 | 0.11 | 0.1 | - |
| P2 | 45W | 0.41 | 0.24 | 0.2 | 0.19 | - |

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [OFL Series Flood Size 1 homepage](#).

Mounting, Options and Accessories



THK- Knuckle with 1/2" NPS threaded pipe



YK- Yoke mount



Slipfitter attachment DSXF1/2 TS



Wire Guard OFL1WG



Vandal Guard (Polycarbonate lens) OFL1VG



OFL1 LED P1 40K MVOLT XXX DDBDX

Lithonia Lighting

Light Output (Lumens) 2295
Watts 21.32
Lumens per Watt (Efficacy) 107.65

Color Accuracy
 Color Rendering Index (CRI) 70

Light Color
 Correlated Color Temperature (CCT) 4000 (Bright White)

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-CX66GJ (9/19/2016)
 Model Number: OFL1 LED P1 40K MVolt XXX DDBDX (Upgrade : 9/19/2016)
 Type: Luminaire - Other

OFL1 LED P1 50K MVOLT XXX DDBDX

Lithonia Lighting

Light Output (Lumens) 2333
Watts 21.02
Lumens per Watt (Efficacy) 110.99

Color Accuracy
 Color Rendering Index (CRI) 70

Light Color
 Correlated Color Temperature (CCT) 5000 (Daylight)

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-ETXERK (9/19/2016)
 Model Number: OFL1 LED P1 50K MVolt XXX DDBDX (Upgrade : 9/19/2016)
 Type: Luminaire - Other

OFL1 LED P2 40K MVOLT XXX DDBDX

Lithonia Lighting

Light Output (Lumens) 4451
Watts 45.26
Lumens per Watt (Efficacy) 98.34

Color Accuracy
 Color Rendering Index (CRI) 70

Light Color
 Correlated Color Temperature (CCT) 4000 (Bright White)

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-H22WXD (9/19/2016)
 Model Number: OFL1 LED P2 40K MVolt XXX DDBDX (Upgrade : 9/19/2016)
 Type: Luminaire - Other

OFL1 LED P2 50K MVOLT XXX DDBDX

Lithonia Lighting

Light Output (Lumens) 4466
Watts 45
Lumens per Watt (Efficacy) 99.24

Color Accuracy
 Color Rendering Index (CRI) 70

Light Color
 Correlated Color Temperature (CCT) 5000 (Daylight)

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-PFJSYS (9/19/2016)
 Model Number: OFL1 LED P2 50K MVolt XXX DDBDX (Upgrade : 9/19/2016)
 Type: Luminaire - Other



OFL Size 1 LED Flood Luminaire



Catalog
Number


Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

| | |
|----------------|--|
| EPA: | 0.6 ft ² (.06 m ²) |
| Depth: | 8.3" (21.1 cm) |
| Width: | 7" (18 cm) |
| Height: | 6.9" (17.4 cm) |
| Weight: | 5 lbs (2.27 kg) |

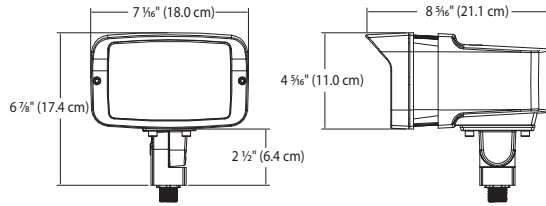

Introduction

The OFL Size 1 Floodlight delivers up to 4,400 lumens, with a robust design and several mounting options making it perfect for light commercial applications. It's the ideal long-life replacement for 70-150W metal halide floods, with typical energy savings up to 84% and expected service life of over 50,000 hours.

Ordering Information

EXAMPLE: OFL1 LED P1 40K MVOLT THK DDBXD

| OFL1 LED | | | | | | | |
|----------|---------------------|-------------------|-------|--------------------|----------|-------------------------------------|-------------------|
| Series | Performance Package | Color Temperature | | Voltage | Mounting | | Finish (required) |
| OFL1 LED | P1 | 40K | 4000K | MVOLT ¹ | THK | Knuckle with 1/2" NPS threaded pipe | DDBXD Dark bronze |
| | P2 | 50K | 5000K | | YK | Yoke | |

Accessories

Ordered and shipped separately.

| | |
|------------|------------------------------------|
| OFL1WG | Wire Guard Accessory |
| OFL1VG | Vandal Guard Accessory |
| DSXF1/2 TS | Slipfitter attachment ² |

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60Hz).
- Only available with OFL LED P1. It will only work on the knuckle mount.

FEATURES & SPECIFICATIONS

INTENDED USE

The traditional and robust design of the OFL1 LED floodlight with energy efficient LEDs, is suitable for replacing up to 150W Metal Halide. It is ideal for landscape, signage, and accent lighting in heavy commercial and residential applications.

CONSTRUCTION

Die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (0.6 ft²) for optimized wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering.

ELECTRICAL

Light engine(s) consist of chip-on-board (COB) LEDs directly coupled to the housing to maximize heat dissipation and promote long life (50,000 hrs).

INSTALLATION

Integral adjustable knuckle with 1/2-14NPS threaded pipe, yoke, or slipfitter attachment, facilitates quick and easy installation to a variety of mounting accessories.

LISTINGS

UL certified to U.S. and Canadian standards. Luminaire is IP65 rated. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Performance Package | System Watts | Dist. Type | Field Angle | | Beam Angle | | 40K | | 50K | |
|---------------------|--------------|------------|-------------|-----|------------|----|--------|-----|--------|-----|
| | | | "H | "V | "H | "V | Lumens | LPW | Lumens | LPW |
| P1 | 21W | WFL | 106 | 106 | 71 | 72 | 2,295 | 109 | 2,333 | 111 |
| P2 | 45W | WFL | 106 | 106 | 71 | 72 | 4,451 | 99 | 4,466 | 99 |

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient | Lumen Multiplier |
|---------|------------------|
| 0°C | 1.06 |
| 10°C | 1.03 |
| 20°C | 1.01 |
| 25°C | 1.00 |
| 30°C | 0.99 |
| 40°C | 0.97 |

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **OFL Flood Size 1** platform based on 9000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | 0 | 25,000 | 50,000 |
|--------------------------|---|--------|--------|
| Lumen Maintenance Factor | 1 | 0.88 | 0.78 |

Electrical Load

| Power Package | System Watts | Current (A) | | | | |
|---------------|--------------|-------------|------|------|------|------|
| | | 120V | 208V | 240V | 277V | 347V |
| P1 | 21W | 0.21 | 0.12 | 0.11 | 0.1 | - |
| P2 | 45W | 0.41 | 0.24 | 0.2 | 0.19 | - |

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [OFL Series Flood Size 1 homepage](#).

Mounting, Options and Accessories



THK- Knuckle with 1/2" NPS threaded pipe



YK- Yoke mount



Slipfitter attachment DSXF1/2 TS



Wire Guard OFL1WG



Vandal Guard (Polycarbonate lens) OFL1VG



OFL1 LED P1 40K MVOLT XXX DDBDX

Lithonia Lighting

LED lighting facts
A Program of the U.S. DOE

| | |
|----------------------------|--------|
| Light Output (Lumens) | 2295 |
| Watts | 21.32 |
| Lumens per Watt (Efficacy) | 107.65 |

| | |
|---|----|
| Color Accuracy Color Rendering Index (CRI) | 70 |
|---|----|

Light Color
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-CX66GJ (9/19/2016)
Model Number: OFL1 LED P1 40K MVolt XXX DDBDX (Upgrade : 9/19/2016)
Type: Luminaire - Other

OFL1 LED P1 50K MVOLT XXX DDBDX

Lithonia Lighting

LED lighting facts
A Program of the U.S. DOE

| | |
|----------------------------|--------|
| Light Output (Lumens) | 2333 |
| Watts | 21.02 |
| Lumens per Watt (Efficacy) | 110.99 |

| | |
|---|----|
| Color Accuracy Color Rendering Index (CRI) | 70 |
|---|----|

Light Color
Correlated Color Temperature (CCT) **5000 (Daylight)**

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-ETXERK (9/19/2016)
Model Number: OFL1 LED P1 50K MVolt XXX DDBDX (Upgrade : 9/19/2016)
Type: Luminaire - Other

OFL1 LED P2 40K MVOLT XXX DDBDX

Lithonia Lighting

LED lighting facts
A Program of the U.S. DOE

| | |
|----------------------------|-------|
| Light Output (Lumens) | 4451 |
| Watts | 45.26 |
| Lumens per Watt (Efficacy) | 98.34 |

| | |
|---|----|
| Color Accuracy Color Rendering Index (CRI) | 70 |
|---|----|

Light Color
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-H22WXD (9/19/2016)
Model Number: OFL1 LED P2 40K MVolt XXX DDBDX (Upgrade : 9/19/2016)
Type: Luminaire - Other

OFL1 LED P2 50K MVOLT XXX DDBDX

Lithonia Lighting

LED lighting facts
A Program of the U.S. DOE

| | |
|----------------------------|-------|
| Light Output (Lumens) | 4466 |
| Watts | 45 |
| Lumens per Watt (Efficacy) | 99.24 |

| | |
|---|----|
| Color Accuracy Color Rendering Index (CRI) | 70 |
|---|----|

Light Color
Correlated Color Temperature (CCT) **5000 (Daylight)**

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-PFJSYS (9/19/2016)
Model Number: OFL1 LED P2 50K MVolt XXX DDBDX (Upgrade : 9/19/2016)
Type: Luminaire - Other