



Distribution blocks, single pole

Type BRU


Screw clamp, DIN 3

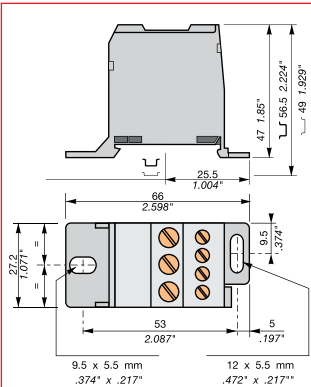

BRU 80 A



BRU 125 A



BRU 80 A

Characteristics

Wire size mm ² / AWG	Solid Stranded	IEC NFC DIN	UL	CSA
		0.5 - 16 0.5 - 10	22-6 AWG	18-6 AWG
Voltage	V	600	600	600
Current	A	80	80	80
Rated wire size	mm ² / AWG	3x16 mm ²	3x4 AWG	3x4 AWG
Inputs		6-16mm ²	8-4 AWG	—
Outputs (4)		2.5-16mm ²	14-10 AWG	—
Outputs (2) with ferrules		2.5-16mm ²	8-4 AWG	—
Recommended torque	Nm / lb.in	0.8 Nm / 7 lb.in		


Selection

Description	Type	Order P/N	Packaging Weight kg
Grey body	<input type="checkbox"/> BRU 80 A	0356 208.25	1 0.137

BRU 125 A - 35 mm² block - 27 mm 1.063" spacing

Characteristics

Rated voltage	V	IEC NFC DIN	UL / CSA
		600	600
Rated current	A	125	125
Inputs : left input wire size	mm ² /AWG	10-35	8-2 AWG
right input wire size	mm ² /AWG	6-16	10-6 AWG
Recommended torque	Nm / lb.in	3.5	31 lb.in
Recommended torque wrench		Allen key/4 mm	
Outputs : with ferrules	mm ² /AWG	4x2.5 to 16	14 AWG to 6 AWG
without ferrules	mm ² /AWG	6x2.5 to 16	14 AWG to 6 AWG
Recommended torque	Nm / lb.in	2 Nm	17.6 lb.in
Screwdriver		Posidriv Z2 or flat	

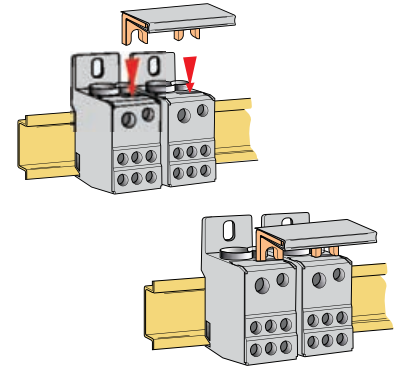

Selection

Description	Type	Order P/N	Packaging Weight kg
Grey body	<input type="checkbox"/> BRU 125 A	0356 204.11	1 0.137

Accessories

End stop	BAM2 9.9 mm	0206 351.16	50
Jumper bar	PCF.1.2	0356 205.12 ①	1
	PCF.1.8	0356 206.13 ①	1

① For BRU 125A only.