






# U5949-O-5T9-CDOT



<b>Catalog Number</b>	U5949-O-5T9-CDOT
<b>Marketing Product Description</b>	5 Terminal Ringless Plain Top Lever Bypass 1 Main Breaker Provision 5th Terminal 9 Oclock Position Single Pedestal Direct Bury Cold Sequence Fuse Pullout Colorado DOT
<b>UPC</b>	784572652927
<b>Length (IN)</b>	10.25
<b>Width (IN)</b>	9.875
<b>Height (IN)</b>	80
<b>Brand Name</b>	Milbank
<b>Type</b>	Ringless Meter Socket
<b>Special Features</b>	Colorado DOT
<b>Application</b>	Meter Socket With Main And Load Center
<b>Standard</b>	UL Listed;Type 3R
<b>Voltage Rating</b>	Up to 240 Volts Alternating Current
<b>Amperage Rating</b>	200 Continuous Ampere
<b>Phase</b>	1 Phase
<b>Frequency Rating</b>	60 Hertz
<b>Size</b>	10.25L x 9.875W x80H
<b>Number Of Cutouts</b>	6
<b>Cutout Size</b>	Breaker Provision

<b>Cable Entry</b>	Underground
<b>Terminal</b>	Single Mechanical
<b>Insulation</b>	Glass Polyester
<b>Mounting</b>	Pedestal
<b>Enclosure</b>	G90 Galvanized Steel with Powder Coat Finish
<b>Jaw Quantity</b>	5 Terminal
<b>Bypass Type</b>	Lever Bypass
<b>Number of Meter Positions</b>	Single Power Head
<b>Equipment Ground</b>	4 Barrel Ground Lug
<b>Hub Opening</b>	Plain Top
<b>Line Side Wire Range</b>	6 AWG - 350 kcmil
<b>Load Side Wire Range</b>	1 AWG - 300 kcmil
<b>Number Of Receptacles</b>	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

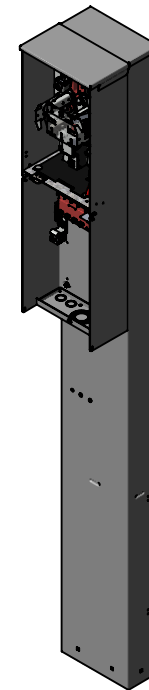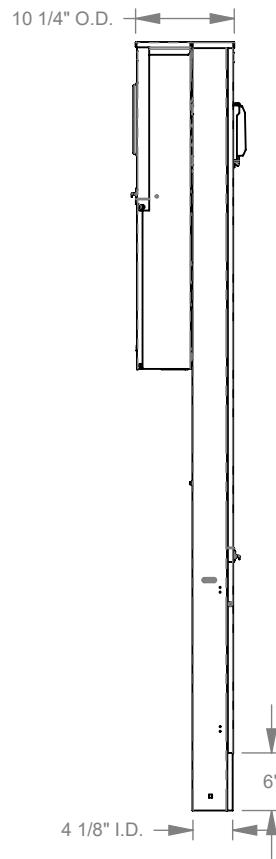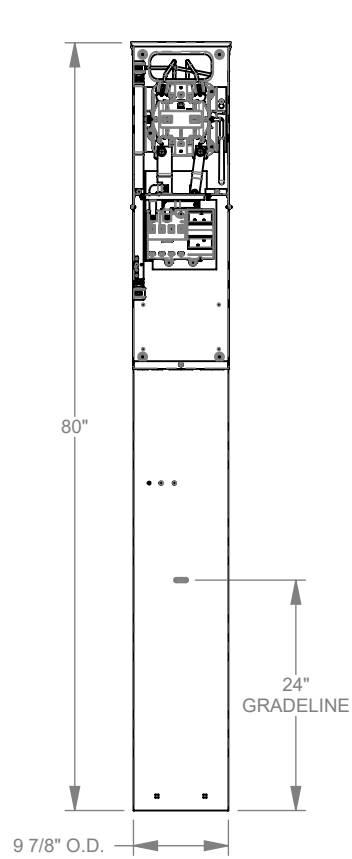

**MILBANK**  
ENERGY AT WORK

Version:

**1**

**All dimensions are +/- 1/16".  
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.