


GFCIs

Specification Grade Dead Front GFCI 20A, 125VAC



2085W

Features

- Rated as a 1½ HP motor control switch.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to downstream loads is disconnected.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

| CATALOG NUMBER | RATING | | COLOR | 3rd PARTY COMPLIANCE | |
|---|--------|-----|--------------|------------------------|-----------------------|
| | A. | VAC | | UL943 C22.2 No. 144 | UL498 C22.2 No. 42 |
| SPECIFICATION GRADE DEAD FRONT GFCI - 1½ HP MOTOR CONTROL RATING | | | | | |
| 2085I | 20 | 125 | Ivory | • | • |
| 2085W | 20 | 125 | White | • | • |
| 2085BK | 20 | 125 | Black | • | • |
| 2085LA | 20 | 125 | Light Almond | • | • |

| CATALOG NUMBER | COLOR |
|-----------------------------|--|
| GFCI EXTENSION RINGS | |
| 1594TPAI | 7.0 cu. in. Extension Ring, Ivory |
| 1594TPAW | 7.0 cu. in. Extension Ring, White |
| 1594TPA | 7.0 cu. in. Extension Ring, Brown |
| 1594TPALA | 7.0 cu. in. Extension Ring, Light Almond |



**1594TPAW
EXTENSION RING**


DEVICES & WALL PLATES

Color Selection Chart

Devices & Plastic Wall Plate Colors



Ivory Light Almond White Green Antique Brass Dark Bronze Nickel

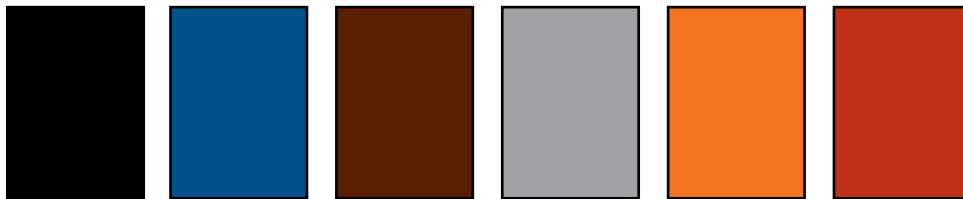

Black Blue Brown Gray Orange Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates


Metal Finish



Aluminum Brass (Brushed) Polished Brass Stainless Steel Brushed Bronze Chrome

Custom Metal Wall Plates Paint Finish Colors

Paint Color

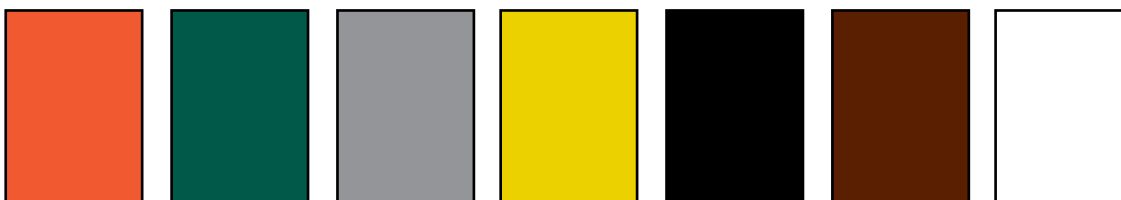

Orange Green Gray Yellow Glossy Black Brown White




Primer Red Pink Flat Black Ivory Light Almond Blue

To order custom metal wall plates, see Pages P-40 – P-42.
For additional colors consult factory.

GFCIs

Specification Grade Dead Front GFCI 20A, 125VAC



2085W

Features

- Rated as a 1½ HP motor control switch.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to downstream loads is disconnected.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

| CATALOG NUMBER | RATING | | COLOR | 3rd PARTY COMPLIANCE | |
|---|--------|-----|--------------|------------------------|-----------------------|
| | A. | VAC | | UL943 C22.2 No. 144 | UL498 C22.2 No. 42 |
| SPECIFICATION GRADE DEAD FRONT GFCI - 1½ HP MOTOR CONTROL RATING | | | | | |
| 2085I | 20 | 125 | Ivory | • | • |
| 2085W | 20 | 125 | White | • | • |
| 2085BK | 20 | 125 | Black | • | • |
| 2085LA | 20 | 125 | Light Almond | • | • |

| CATALOG NUMBER | COLOR |
|-----------------------------|--|
| GFCI EXTENSION RINGS | |
| 1594TPAI | 7.0 cu. in. Extension Ring, Ivory |
| 1594TPAW | 7.0 cu. in. Extension Ring, White |
| 1594TPA | 7.0 cu. in. Extension Ring, Brown |
| 1594TPALA | 7.0 cu. in. Extension Ring, Light Almond |



**1594TPAW
EXTENSION RING**


DEVICES & WALL PLATES

Color Selection Chart

Devices & Plastic Wall Plate Colors



Ivory Light Almond White Green Antique Brass Dark Bronze Nickel

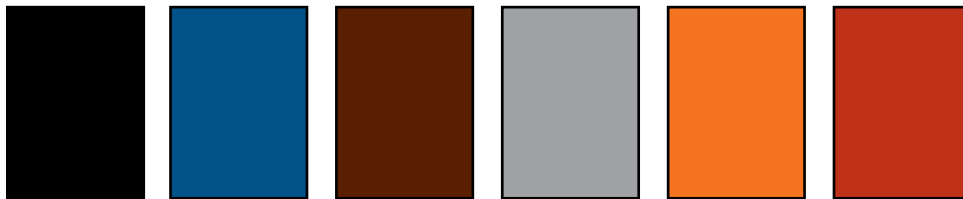


Black Blue Brown Gray Orange Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates


Metal Finish

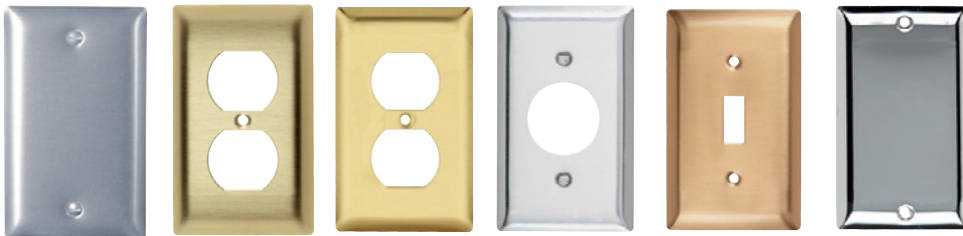


Aluminum Brass (Brushed) Polished Brass Stainless Steel Brushed Bronze Chrome

Custom Metal Wall Plates Paint Finish Colors

Paint Color

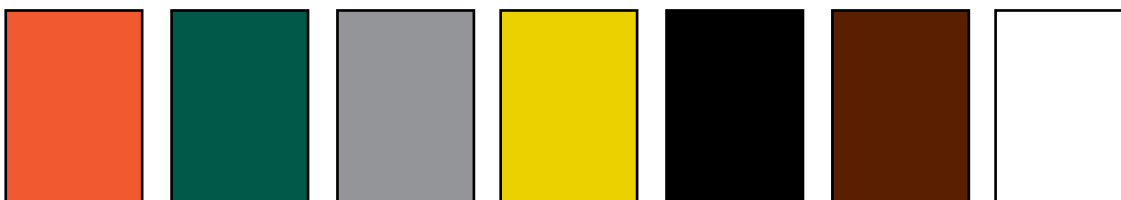

Orange Green Gray Yellow Glossy Black Brown White

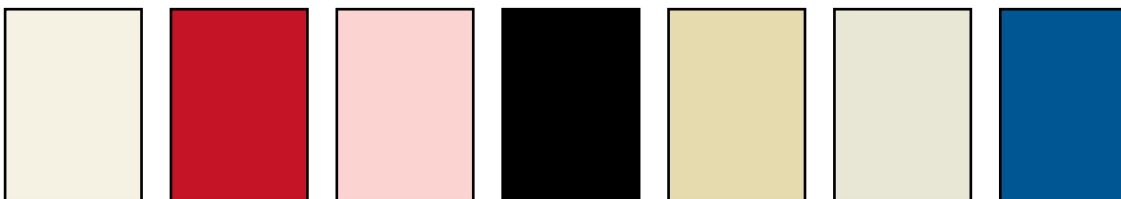

Primer Red Pink Flat Black Ivory Light Almond Blue

To order custom metal wall plates, see Pages P-40 – P-42.
For additional colors consult factory.