

L. H. D O T T I E

# MARKING PAINTS & WORKPLACE IDENTIFICATION PAINTS

A COMPLETE LINE OF  
PAINTS FOR MARKING AND  
IDENTIFICATION IN  
THE WORKPLACE

SEE FOR YOURSELF  
WHY AERVOE PROVIDES  
SUPERIOR SOLUTIONS








### Construction Marking Paint

AerVOE Construction Marking Paint is the flagship of the line, offering high quality paint that is priced competitively to meet a variety of marking applications while providing good color visibility and durability. Why pay for the added quality of AerVOE Survey Marking Paint if the mark does not need to last as long? Great color durability up to three months.

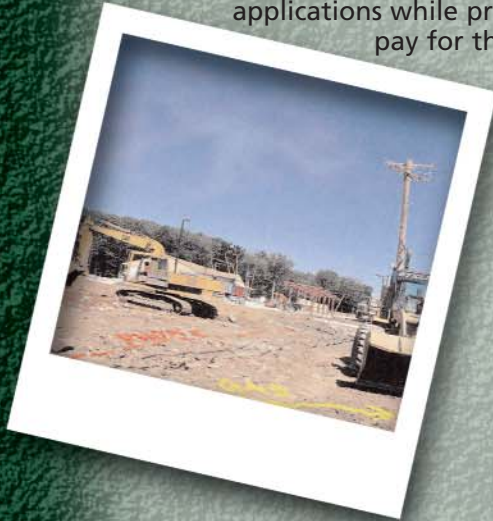

Can Size (Net)	Weight	Case Pack
20-oz. Aerosol (17-oz.)	18 lbs.	12 cans


#### Color Selection

Regular	Fluorescent
254 Blue	246 Fl. Red
255 White	247 Fl. Orange
256 Red	249 Fl. Pink
258 Hi-Vis Yellow	283 Fl. Red-Orange
259 Green	

Can Size (Net)	Weight	Case Pack
20-oz. Aerosol (15-oz.)	15 lbs.	12 cans
200 Clear Coat		

### Invert-A-Cap®

The ultimate writing tool is inverted marking paint. Use where controlled applications (letters and numbers) are needed, in addition to lines. Best positive delivery cut off and non-clogging performance with the least possible tip paint build-up.

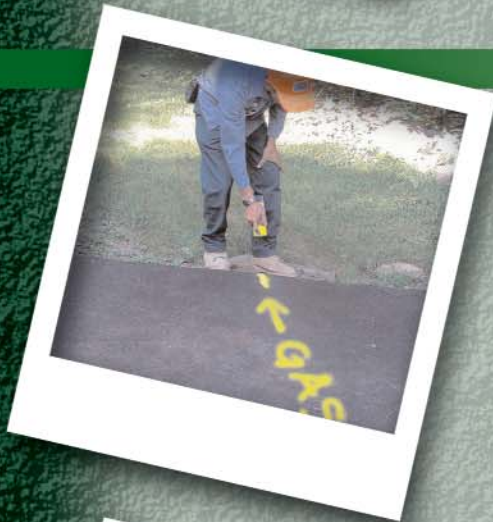

Can Size (Net)	Weight	Case Pack
16-oz. Aerosol (12-oz.)	14 lbs.	12 cans

#### Color Selection

Regular	Fluorescent
261 Red	272 Fl. Orange
262 Yellow	274 Fl. Green
263 Blue	279 Fl. Pink

### All Purpose Marking Paint

This good, all purpose paint is an economically priced marking paint that is designed to provide a very cost-effective approach to marking and still provides good visibility in the two-month range.



Can Size (Net)	Weight	Case Pack
20-oz. Aerosol (15-oz.)	17 lbs.	12 cans

#### Color Selection

Regular	Fluorescent
1381 Red	1390 Fl. Red
1382 Yellow	1391 Fl. Green
1387 white	1392 Fl. Orange
	1394 Fl. Blue
	1395 Fl. Red-Orange



# MARKING PAINTS

## Color Selection

### Regular Colors



Red 256, 261, 1381



Yellow 252\*, 262, 1382



Blue 254, 263, 1383\*



Green 259, 1384\*



Orange 257\*, 265\*, 1385\*



White 255, 267\*, 1387



Hi-Vis Yellow 258



Purple 260\*

### Fluorescent Colors



Fl. Red 246, 1390



Fl. Orange 247, 272, 1392



Fl. Green 274, 1391



Fl. Blue 1394



Fl. Pink, 249, 279, 1399\*



Fl. Red-Orange 283, 1395

The printed colors on these pages approximate the appearance of the actual paint colors

\* Special Order

## Marking Paint Performance Specifications

MARKING PRODUCT	QUALITY	INITIAL VISIBILITY	MARK PERFORMANCE	DURABILITY	DELIVERY RATE	LINEAR COVERAGE*	APPLICATION
Invert-A-Cap®	Better	Excellent	3-4 Months	Excellent	2.6 g/sec	350'	Inverted marking paint best for writing tool and controlled spray. Non-freezing formula; operational to 14°F (-10° C)
Construction Marking Paint	Better	Excellent	3 Months	Excellent	3.2 g/sec.	420'	Utility / locator, construction and proposed excavation
All Purpose Marking Paint	Good	Good	2 Months	Good	3.2 g/sec.	380'	Proposed excavation, construction landscape, utility / locator & survey marking.

\* Coverage varies depending on width of mark and hide desired.

## APWA / One Call Color Descriptions

The American Public Works Association (APWA) requires public agencies, utilities, and contractors that excavate underground to use this color standard to identify the location and type of sub-surface utilities. Aervoe Industries was the first marking paint manufacturer to provide the uniform standard for these colors, and our products still proudly carry the original One-Call Systems International trademark.

APPLICATION	AERVOE PRODUCT	CONSTRUCTION	ALL PURPOSE	INVERT-A-CAP®
Electric	Red	256	1381	261
Gas-Oil	Yellow	252*	1382	262
Water	Blue	254	1383*	263
Sewer	Green	259	1384*	—
Communications / CATV	Orange	257*	1385*	265*
Proposed Excavation	White	255	1387	267*
Reclaimed Water	Purple	260*	—	—
Temporary Survey Marking	Pink	249	1399*	279

\*Special Order

## Applicators & Measuring Devices

### 242 Can Hand'ler

- Two-finger trigger eliminates finger fatigue
- Trigger lock prevents accidental discharge
- Unique locking collar
- Use with any standard standard aerosol can with 1" valve cap

### 245 Marking Stick

- Approximate length-32"
- Single-hand operation
- Excellent can balance
- Convenient trigger actuator

Product	Net Wt.	Case Pack
242 Can Hand'ler	2	12
245 Marking Stick	2 lbs.	1





# IDENTIFICATION PAINTS



## Rust Proof Paint – Solvent-Based

Aervoe's high-performance Rust Proof solvent-based formulation withstands corrosion and exposure from mild to moderate conditions while maintaining high gloss levels. Wide color selection includes OSHA safety, HVAC, commercial and selected factory equipment touch-up colors.

- High gloss, high solids formula
- Ideal for equipment touch-up / OEM production applications indoors & out
- Resistant to mild and moderate environments including intermittent exposure to water, salt spray, moisture and temperatures up to 300°F (149°C)
- Can be applied directly over rust with minor surface preparation
- Tough, protective coating will not chip or peel
- Aerosol dries to touch in just 15 minutes
- Provides excellent hiding characteristics with smooth, even coverage
- Not recommended for immersion services

**Uses:** Metal, wood and other common surfaces; machinery, motors, tools, cabinets, toolboxes, steel bars and railings, pipelines, drums, conduit, ducts, furniture, electrical equipment. Ideal for marking hazard areas and color coding steel.

### OSHA Colors














The Occupational Safety and Health Act (OSHA) stipulates that industrial plants provide color coded safety equipment and hazard areas. The accompanying list identifies the OSHA-designated colors and their meanings

### HVAC Colors

Color designations are currently used by DuPont® for its refrigerants. Although refrigerant manufacturers make a concerted effort to select colors to differentiate refrigerant types, color guidelines are not a substitute for reading cylinder labels and markings. Aervoe suggests the following refrigerant colors be used for coding.

Please note: These colors are printed approximations of actual paint colors

### Color Selection

OSHA Colors	APPLICATION	MARKING COLOR	AERVOE PRODUCT
 OSHA Purple 300*	Radiation hazard	OSHA Purple	300*
 OSHA Red 301	Danger, stop, or location of fire protection equipment	OSHA Red	301
 OSHA Yellow 302	Caution and physical hazards	OSHA Yellow	302
 OSHA Blue 303	Equipment being repaired. Caution against moving or starting	OSHA Blue	303
 OSHA Green 304	Location of safety equipment other than fire	OSHA Green	304
 OSHA Orange 305	Dangerous parts of machinery or energized equipment	OSHA Orange	305
 OSHA Black 306	Traffic and housekeeping	OSHA Black	306
 OSHA White 307*	Traffic and housekeeping	OSHA White	307*
<b>HVAC Colors</b>			
 Purple 300*	Refrigerant R502	Purple	300*
 Light Green 304	Refrigerant R22	Light Green	304
 Orange 305	Refrigerant R404A	Orange	305
 Tan 317*	Refrigerant R409A	Tan	317*
 Light Blue 318*	Refrigerant R134A	Light Blue	318*

\* Special Order

**Can Size (Net)**  
16-oz. Aerosol  
(12-oz.)

**Weight**  
14 lbs.

**Case Pack**  
12 cans

**Solvent Based Color Selection**  
300\* Safety Purple  
301 Safety Red  
302 Safety Yellow  
303 Safety Blue  
304 Safety Green  
305 Safety Orange  
306 Safety Black  
307\* Safety White  
312 Flat Black  
317\* Tan  
318\* Light Blue  
333 Dark Gray-ANSI-33  
349 Meter Gray-ANSI-49  
361 Light Gray-ANSI-61

\* Special Order

