ELLIOTT ELECTRIC SUPPLY
We Deliver...Lower Cost, Quality Products, & Personal Service
2310 N. Stallings Dr.
Nacogdoches, TX 75964-0
Phone: 9365697941
Fax: 9365604685



# 5233830 3" SCH40 90D PVC ELBOW BELL END

*CANTEX,INC*

| | |
|---|---|
| Catalog Number | 5233830 |
| Manufacturer | CANTEX,INC |
| Description | 90° Elbow, 3 in Trade Size, 20.375 in Length, 3.5 in Outside Diameter, 3.008 in Inside, 13 in Bend Radius, 90 ° Bend Angle, Gray, 0.216 in Wall Thickness, 3.66 lb/EA |
| Weight per unit | 3.7 (lbs/each) |
| Product Category | PVC Sch 40 Elbows |

## Dimensions and Weight

| | |
|---|---|
| Size | 3 in. x 90-Degree Bell End Schedule 40 Standard Radius Elbow |

## Descriptions

| | |
|---|---|
| Description | 3" SCH40 90D PVC ELBOW BELL END |
| Features | CANTEX 5233830 is a 3 in. x 90-Degree Bell End Schedule 40 Standard Radius Elbow used to change the direction of a conduit run by 90-Degree |
| Long Description | CANTEX 5233830 is a 3 in. x 90-Degree Bell End Schedule 40 Standard Radius Elbow used to change the direction of a conduit run by 90-Degree |
| Product Type | 3 UL40 90 BND STD RB |
| Extra Long Description | CTX 5233830 3 UL40 90 BND STD RB |

## Manufacturer Information

| | |
|---|---|
| Brand | CANTEX INC. |
| GTIN | 00088700537705 |
| UPC | 881780 |

## Taxonomies, Classifications, and Categories

| | |
|---|---|
| Category Description | PVC ELBOWS |
| Type | 3 in. x 90-Degree Bell End Schedule 40 Standard Radius Elbow |

## Trade Size

| | |
|---|---|
| Trade Size | 3 |

## Packaging

| | |
|---|---|
| Carton | 14 |
| Weight Per Each | 3.7 (lbs/each) |

# Schedule 40 Standard Radius Elbows - Bell End

CANTEX

## Schedule 40 90° Elbow - Bell End

| Part Number | Trade Size | Carton Qty. | "R" | "O" | "H' | "S" MIN | "B" MIN | "L" |
|---|---|---|---|---|---|---|---|---|
| 5233823 | 1/2 | 50 | 4.000 | 4.000 | 4.000 | 1.500 | 1.000 | 6.250 |
| 5233824 | 3/4 | 35 | 4.500 | 4.500 | 4.500 | 1.500 | 1.500 | 7.125 |
| 5233825 | 1 | 20 | 5.750 | 5.75 | 5.75 | 1.875 | 1.500 | 9.000 |
| 5233826 | 1-1/4 | 30 | 7.250 | 7.250 | 7.250 | 2.000 | 1.500 | 11.375 |
| 5233827 | 1-1/2 | 30 | 8.250 | 8.250 | 8.250 | 2.000 | 2.000 | 13.000 |
| 5233828 | 2 | 15 | 9.500 | 9.500 | 9.500 | 2.000 | 2.000 | 15.000 |
| 5233829 | 2-1/2 | 18 | 10.500 | 10.500 | 10.500 | 3.000 | 2.250 | 16.500 |
| 5233830 | 3 | 14 | 13.000 | 13.000 | 13.000 | 3.125 | 2.500 | 20.375 |
| 5233831 | 3-1/2 | 12 | 15.000 | 15.000 | 15.000 | 3.250 | 3.250 | 23.500 |
| 5233832 | 4 | 10 | 16.000 | 16.000 | 16.000 | 3.375 | 3.250 | 25.125 |
| 5233835 | 5 | 30* | 24.000 | 24.000 | 24.000 | 3.625 | 4.250 | 37.625 |
| 5233834 | 6 | 25* | 30.000 | 30.000 | 30.000 | 3.750 | 5.000 | 47.125 |

* Pallet Quantity


Dimensions are nominal

Conforms to UL651 and NEMA TC3
Material is Rigid PVC
Bend Tolerance is ±2°

CANTEX 90-Degree Bell End Schedule 40 Standard Radius Elbows are used to change the direction of a conduit run by 90 degrees.



- Schedule 40 PVC construction for strength and durability
- For indoor or outdoor use
- Suitable for aboveground or buried
- Bell end for easy installation
- ETL Listed
- Made in USA

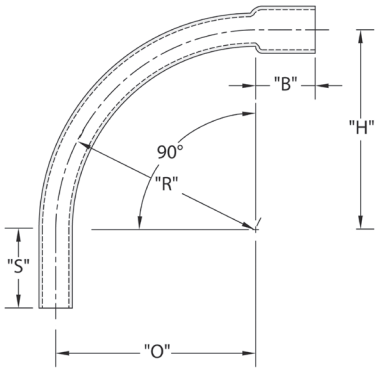


## Schedule 40 45° Elbow - Bell End

| Part Number | Trade Size | Carton Qty. | "R" | "O" | "H' | "S" MIN | "B" MIN | "L" |
|---|---|---|---|---|---|---|---|---|
| 5233763 | 1/2 | 50 | 4.000 | 1.188 | 2.813 | 1.500 | 1.000 | 3.125 |
| 5233764 | 3/4 | 25 | 4.500 | 1.313 | 3.188 | 1.500 | 1.500 | 3.500 |
| 5233765 | 1 | 20 | 5.750 | 1.688 | 4.063 | 1.875 | 1.500 | 4.500 |
| 5233766 | 1-1/4 | 25 | 7.250 | 2.125 | 5.125 | 2.000 | 1.500 | 5.688 |
| 5233767 | 1-1/2 | 25 | 8.250 | 2.438 | 5.813 | 2.000 | 2.000 | 6.500 |
| 5233768 | 2 | 10 | 9.500 | 2.813 | 6.750 | 2.000 | 2.000 | 7.500 |
| 5233769 | 2-1/2 | 20 | 10.500 | 3.063 | 7.438 | 3.000 | 2.250 | 8.250 |
| 5233770 | 3 | 8 | 13.000 | 3.813 | 9.188 | 3.500 | 2.500 | 10.188 |
| 5233771 | 3-1/2 | 5 | 15.000 | 4.375 | 10.625 | 3.250 | 3.250 | 11.813 |
| 5233772 | 4 | 20 | 16.000 | 4.688 | 11.188 | 3.375 | 3.250 | 12.563 |
| 5233773 | 5 | 30* | 24.000 | 7.000 | 17.000 | 3.625 | 4.250 | 18.875 |
| 5233774 | 6 | 25* | 30.000 | 8.875 | 21.250 | 3.750 | 5.000 | 23.563 |

* Pallet Quantity


Dimensions are nominal

Conforms to UL651 and NEMA TC3
Material is Rigid PVC
Bend Tolerance is ±2°

CANTEX 45-Degree Bell End Schedule 40 Standard Radius Elbows are used to change the direction of a conduit run by 45 degrees.



- Schedule 40 PVC construction for strength and durability
- For indoor or outdoor use
- Suitable for aboveground or buried
- Bell end for easy installation
- ETL Listed
- Made in USA

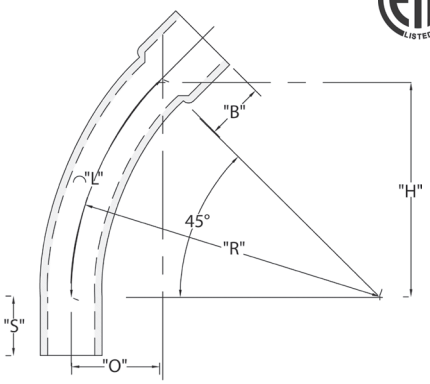

# Schedule 40 Standard Radius Elbows - Bell End

CANTEX

## Schedule 40 30° Elbow - Bell End




CANTEX 30-Degree Bell End Schedule 40 Standard Radius Elbows are used to change the direction of a conduit run by 30 degrees.

- Schedule 40 PVC construction for strength and durability
- For indoor or outdoor use
- Suitable for aboveground or buried
- Bell end for easy installation
- ETL Listed
- Made in USA

| Part Number | Trade Size | Carton Qty. | "R" | "O" | "H' | "S" MIN | "B" MIN | "L" |
|---|---|---|---|---|---|---|---|---|
| 5233748 | 2 | 10 | 9.500 | 1.250 | 4.750 | 2.000 | 2.000 | 5.000 |
| 5233750 | 3 | 8 | 13.000 | 1.750 | 6.500 | 3.125 | 2.500 | 6.813 |
| 5233751 | 3-1/2 | 5 | 15.000 | 2.000 | 7.563 | 3.250 | 3.250 | 7.875 |
| 5233776 | 4 | 20 | 16.000 | 2.063 | 8.000 | 3.375 | 3.250 | 8.375 |
| 5233753 | 5 | 30* | 24.000 | 3.188 | 12.000 | 3.625 | 4.250 | 12.563 |
| 5233754 | 6 | 50* | 30.000 | 4.000 | 15.000 | 3.750 | 5.00 | 15.688 |

* Pallet Quantity

Dimensions are nominal

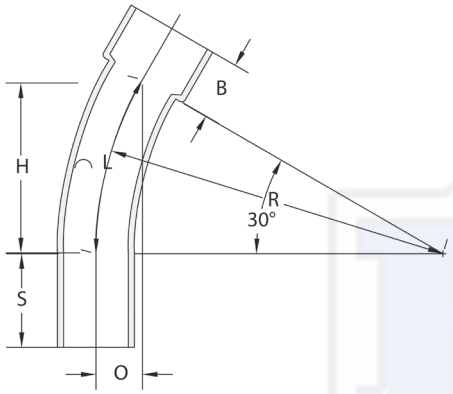


Additional sizes are available. Call for information.

Conforms to UL651 and NEMA TC3
Material is Rigid PVC
Bend Tolerance is ±2°

## Schedule 40 22-1/2° Elbow - Bell End




CANTEX 22-1/2-Degree Bell End Schedule 40 Standard Radius Elbows are used to change the direction of a conduit run by 22-1/2 degrees.

- Schedule 40 PVC construction for strength and durability
- For indoor or outdoor use
- Suitable for aboveground or buried
- Bell end for easy installation
- ETL Listed
- Made in USA

| Part Number | Trade Size | Carton Qty. | "R" | "O" | "H' | "S" MIN | "B" MIN | "L" |
|---|---|---|---|---|---|---|---|---|
| 5234097 | 3/4 | 25 | 4.500 | .375 | 1.750 | 1.500 | 1.500 | 1.750 |
| 5236402 | 1 | 20 | 5.750 | .313 | 2.188 | 1.875 | 1.500 | 2.250 |
| 5236403 | 1-1/4 | 25 | 7.250 | .563 | 2.750 | 2.000 | 1.500 | 2.875 |
| 5234094 | 1-1/2 | 20 | 8.250 | .625 | 3.125 | 2.000 | 2.000 | 3.250 |
| 5234067 | 2 | 10 | 9.500 | .750 | 3.625 | 2.000 | 2.000 | 3.750 |
| 5234096 | 2-1/2 | 10 | 10.500 | .813 | 4.000 | 3.000 | 2.250 | 4.125 |
| 5234068 | 3 | 8 | 13.000 | 1.000 | 5.000 | 3.125 | 2.500 | 5.125 |
| 5234095 | 3-1/2 | 5 | 15.000 | 1.125 | 5.750 | 3.250 | 3.250 | 5.875 |
| 5233867 | 4 | 20 | 16.000 | 1.250 | 6.125 | 3.375 | 3.250 | 6.250 |
| 5234037 | 5 | 60* | 24.000 | 1.813 | 9.188 | 3.625 | 4.250 | 9.375 |
| 5233901 | 6 | 50* | 30.000 | 2.250 | 11.500 | 3.750 | 5.000 | 11.750 |

* Pallet Quantity

Dimensions are nominal

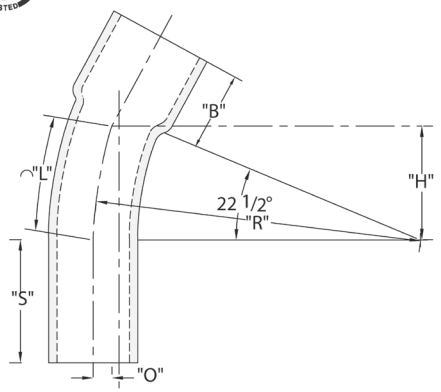


Conforms to UL651 and NEMA TC3
Material is Rigid PVC
Bend Tolerance is ±2°