

# Hotel Room Annunciator CFA Series

The Edwards 7005-G5 24 volt Hotel Room Annunciator is for use in hotel rooms and other areas designed to assist those with audible, visual, or physical impairments. The kit consists of a 6536-G5 horn/strobe for audible and visual signaling, a 620 push button, a 147-10 mounting plate, and a 592 transformer. Each component may also be ordered individually.

## 6536-G5 Horn/Strobe

The 6536-G5 Horn/Strobe is designed for use in a single gang 2" (51mm) x 4" (102mm) box located over the door. Each unit contains an audible horn signal which generates an 82 dBA sound pressure level at 10 ft. and a 50 cd strobe.

## 592 Transformer

The Edwards 592 transformer is used to power the horn/strobe. It is equipped with a grounding wire and is suitable for installation in both plastic and metal boxes.

## 620 Push Button

The 620 push button station provides call activation when installed in the 147-10 mounting plate (page 6-10). The plate has a stainless steel face. The switch is momentary.

## Features and Specifications

- Kit includes 6536-G5 Horn/Strobe, 592 Transformer and 620 Push Button
- Neutral white color
- Fits single gang box
- 92dB buzzer at 1 meter/82dB at 10ft.
- UL 1638 listed - Horn/Strobe



## Ordering Information

| Description             | Cat. No.        | Transformer |           | Horn/Strobe Current                               | Lens Color | dBA at 1m/10ft. | Strobe Candela |
|-------------------------|-----------------|-------------|-----------|---|------------|-----------------|----------------|
|                         |                 | Primary     | Secondary |   |            |                 |                |
| Call for Assistance Kit | <b>7005-G5</b>  | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Clear      | 92/82           | 50             |
|                         | <b>7005A-G5</b> | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Amber      | 92/82           | 40             |
|                         | <b>7005B-G5</b> | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Blue       | 92/82           | 17             |
|                         | <b>7005G-G5</b> | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Green      | 92/82           | 29             |
|                         | <b>7005R-G5</b> | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Red        | 92/82           | 25             |


<sup>1</sup>AC voltage frequency is 50/60 Hz



# Hotel Room Annunciator CFA Series




## Technical Information

Connecting 7005-G5 Hotel Room Annunciator

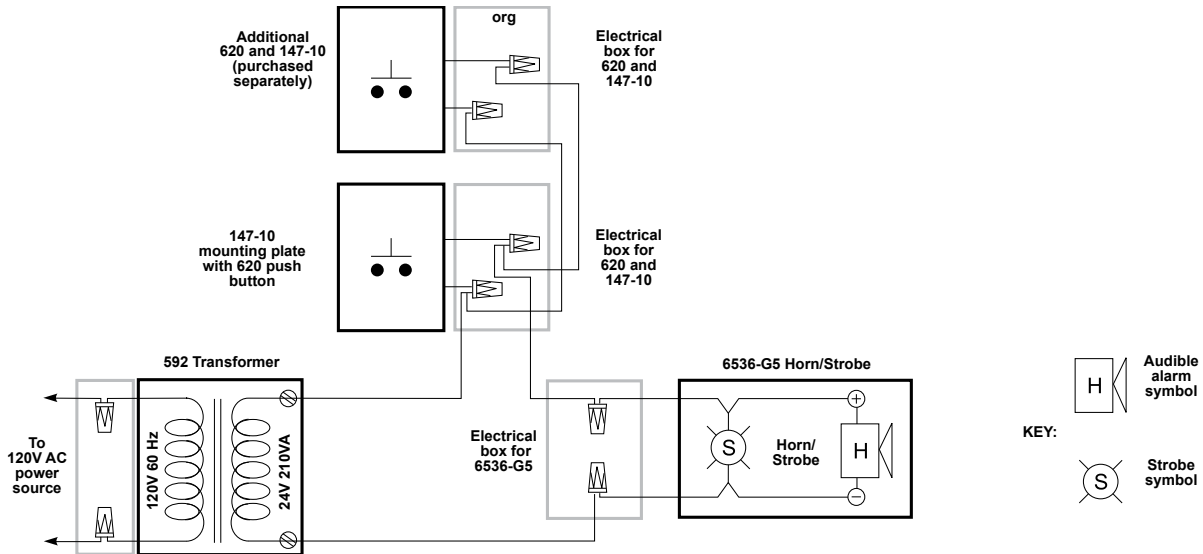

## Weights and Dimensions

| Cat. No. | Approx. Net Weight (lb.) | Approx. Shipping Weight (lb.) |
|----------|--------------------------|-------------------------------|
| 7005-G5  | 1.46                     | 1.66                          |
| 7005A-G5 | 1.46                     | 1.66                          |
| 7005B-G5 | 1.46                     | 1.66                          |
| 7005G-G5 | 1.46                     | 1.66                          |
| 7005R-G5 | 1.46                     | 1.66                          |

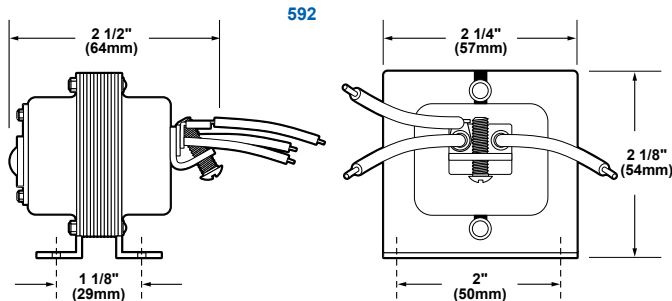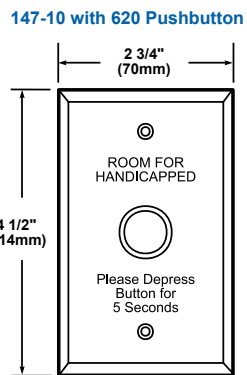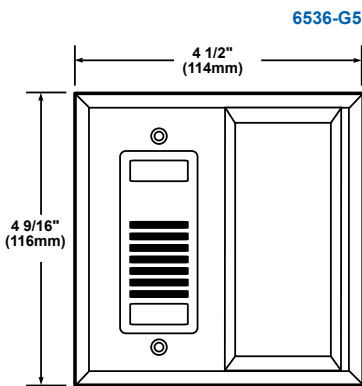

6  
CALL FOR ASSISTANCE

# Hotel Room Annunciator CFA Series

The Edwards 7005-G5 24 volt Hotel Room Annunciator is for use in hotel rooms and other areas designed to assist those with audible, visual, or physical impairments. The kit consists of a 6536-G5 horn/strobe for audible and visual signaling, a 620 push button, a 147-10 mounting plate, and a 592 transformer. Each component may also be ordered individually.

## 6536-G5 Horn/Strobe

The 6536-G5 Horn/Strobe is designed for use in a single gang 2" (51mm) x 4" (102mm) box located over the door. Each unit contains an audible horn signal which generates an 82 dBA sound pressure level at 10 ft. and a 50 cd strobe.

## 592 Transformer

The Edwards 592 transformer is used to power the horn/strobe. It is equipped with a grounding wire and is suitable for installation in both plastic and metal boxes.

## 620 Push Button

The 620 push button station provides call activation when installed in the 147-10 mounting plate (page 6-10). The plate has a stainless steel face. The switch is momentary.

## Features and Specifications

- Kit includes 6536-G5 Horn/Strobe, 592 Transformer and 620 Push Button
- Neutral white color
- Fits single gang box
- 92dB buzzer at 1 meter/82dB at 10ft.
- UL 1638 listed - Horn/Strobe



## Ordering Information

| Description             | Cat. No.        | Transformer |           | Horn/Strobe Current                               | Lens Color | dBA at 1m/10ft. | Strobe Candela |
|-------------------------|-----------------|-------------|-----------|---|------------|-----------------|----------------|
|                         |                 | Primary     | Secondary |   |            |                 |                |
| Call for Assistance Kit | <b>7005-G5</b>  | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Clear      | 92/82           | 50             |
|                         | <b>7005A-G5</b> | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Amber      | 92/82           | 40             |
|                         | <b>7005B-G5</b> | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Blue       | 92/82           | 17             |
|                         | <b>7005G-G5</b> | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Green      | 92/82           | 29             |
|                         | <b>7005R-G5</b> | 120V AC     | 24V AC    | 0.175 A @ 24V AC <sup>1</sup><br>0.125 A @ 24V DC | Red        | 92/82           | 25             |


<sup>1</sup>AC voltage frequency is 50/60 Hz



# Hotel Room Annunciator CFA Series




## Technical Information

Connecting 7005-G5 Hotel Room Annunciator

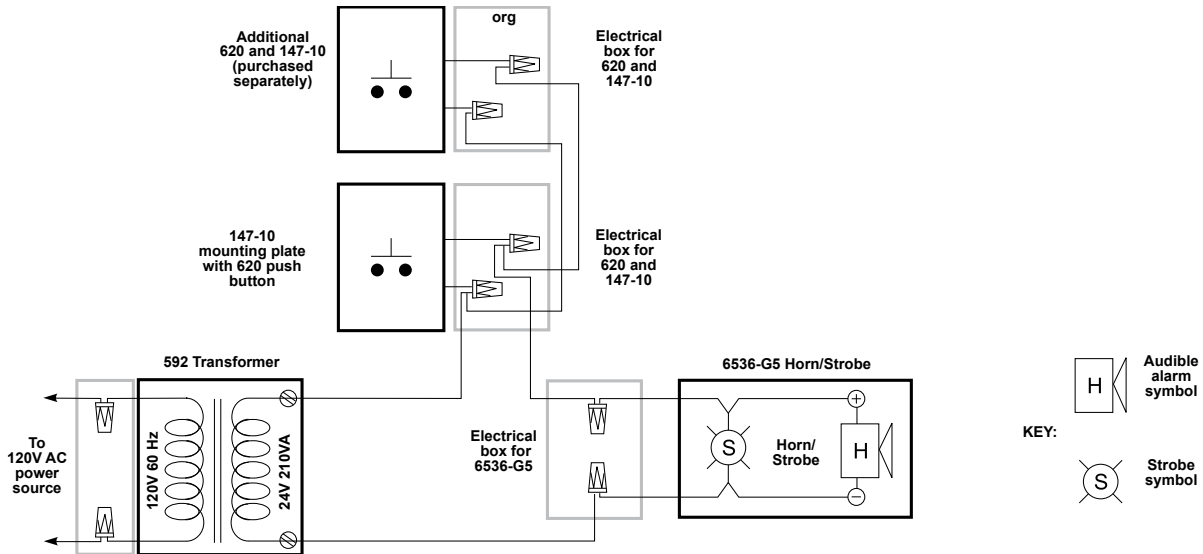

## Weights and Dimensions

| Cat. No. | Approx. Net Weight (lb.) | Approx. Shipping Weight (lb.) |
|----------|--------------------------|-------------------------------|
| 7005-G5  | 1.46                     | 1.66                          |
| 7005A-G5 | 1.46                     | 1.66                          |
| 7005B-G5 | 1.46                     | 1.66                          |
| 7005G-G5 | 1.46                     | 1.66                          |
| 7005R-G5 | 1.46                     | 1.66                          |

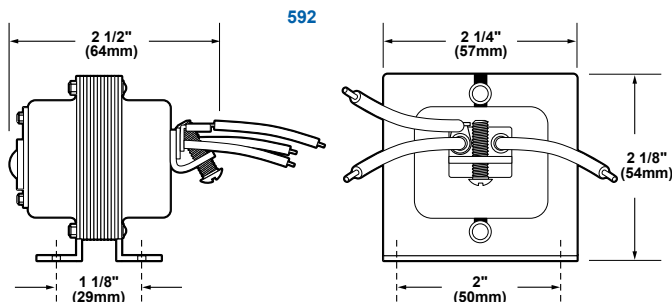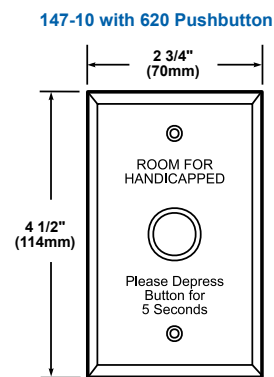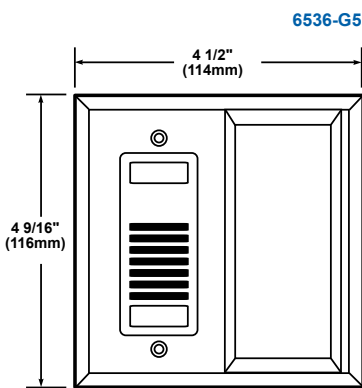

6  
CALL FOR ASSISTANCE