


# Hammers, Chisels & Punches

Klein hammers, chisels and punches are designed and created to strike through jobsite challenges. Engineered with the professional in mind, each tool is job-matched to fit the task at hand.



For Professionals...  
Since 1857™



## Hammers

### Electrician's Straight-Claw Hammer

- Durable plastic-alloy jacketing helps to protect neck from fraying and splintering if incorrectly struck or overstruck
- High-strength fiberglass shaft absorbs shock and keeps head tight
- Comfortable, perforated neoprene grip bonded to handle
- Extra-long neck and narrow striking face are ideal for reaching into outlet boxes and other tight areas
- Balanced and designed specifically for use in electrical work

Cat. No.	Head Weight	Overall Length	Weight
807-18	18.0 oz. (510 g)	15" (381.0 mm)	1.9 lbs. (0.86 kg)



807-18

### Straight-Claw Hammers-Heavy-Duty

- Durable plastic-alloy jacketing helps to protect neck from fraying and splintering if incorrectly struck or overstruck
- High-strength fiberglass shaft absorbs shock and keeps head tight
- Comfortable, perforated neoprene grip bonded to handle
- Straight-claw design for easy nail pulling in tight quarters

Cat. No.	Head Weight	Overall Length	Weight
808-16	16.0 oz. (454 g)	13" (330.2 mm)	1.9 lbs. (0.86 kg)
808-20	20.0 oz. (567 g)	14" (355.6 mm)	2.0 lbs. (0.91 kg)



808-16

### Curved-Claw Hammers-Heavy-Duty

- Durable plastic-alloy jacketing helps to protect neck from fraying and splintering if incorrectly struck or overstruck
- High-strength fiberglass shaft absorbs shock and keeps head tight
- Comfortable, perforated neoprene grip bonded to handle
- Curved claw gives maximum nail-pulling leverage

Cat. No.	Head Weight	Overall Length	Weight
818-16	16.0 oz. (454 g)	13" (330.2 mm)	1.9 lbs. (0.86 kg)
818-20	20.0 oz. (567 g)	14" (355.6 mm)	2.0 lbs. (0.91 kg)



818-16

### Lineman's Straight-Claw Hammer

- Heavy-duty, double-duty hammer drives lags and pulls large nails
- Special high-carbon steel head with solid, octagon-shaped driving end and thick, strong claw
- Straight-grain hickory handle, lacquered to withstand weather

Cat. No.	Head Weight	Overall Length	Weight
832-32	32.0 oz. (907 g)	15" (381.0 mm)	2.5 lbs. (1.13 kg)



832-32

See page 310 for additional information on warnings.



For Sledge, Brass, Copper + Normalized Hammers, see Mining Tools section

## Hammers

### Ball-Peen Hammers

- Forged high-carbon steel head is hardened for additional durability
- Crowned face with uniform bevel
- Smoothly rounded peen
- Straight-grain hickory handle is stained and lacquered to withstand weather



803-12

Cat. No.	Head Weight	Overall Length	Weight
803-8	8.0 oz. (227 g)	11-1/2" (292.1 mm)	12.0 oz. (340 g)
803-12	12.0 oz. (340 g)	12-1/2" (317.5 mm)	1.1 lbs. (0.50 kg)
803-16	16.0 oz. (454 g)	13-1/2" (342.9 mm)	1.4 lbs. (0.64 kg)
803-24	24.0 oz. (680 g)	15" (381.0 mm)	1.9 lbs. (0.86 kg)
803-32	32.0 oz. (907 g)	15" (381.0 mm)	2.5 lbs. (1.13 kg)

### Hand-Drilling Hammer

- Extra-heavy, forged steel head, hardened and tempered
- Short handle for working in close quarters
- Select hickory handle, triple-wedged and lacquered to withstand weather
- Special handle treatment removes handle moisture and replaces it with oil to help eliminate the effects of extreme temperatures



823-48

Cat. No.	Head Weight	Overall Length	Weight
823-48	48 oz. (1361 g)	10" (254.0 mm)	3.3 lbs. (1.50 kg)

### Lineman's Double-Face Hammer

- Designed for pole-line work
- Rugged and well-balanced, with the weight to drive lag bolts
- Faces with 1-3/4" (44 mm) round-crown driving surface and beveled edges
- Cat. No. 809-36MF has one milled face for driving staples used in pole-line work and common, unhardened nails
- Forged, tempered-steel head is only 3-3/4" (95 mm) long for use in tight areas



809-36

Cat. No.	Head Weight	Overall Length	Weight
809-36	36 oz. (1021 g)	14" (355.6 mm)	2.5 lbs. (1.13 kg)
809-36MF	36 oz. (1021 g)	14" (355.6 mm)	2.5 lbs. (1.13 kg)



809-36  
both sides

809-36MF  
one side

### Non-Sparking Hammers


- Non-sparking, non-marring brass-head hammers
- Fiberglass handle includes TPR overmold for extra comfort and shock absorption.
- Built-in overstrike protector absorbs shock and vibration when overstrike occurs
- Large sweep at base prevents loss of grip
- Head is securely epoxied to prevent detachment
- Does not contain beryllium



819-03

Cat. No.	Head Weight	Overall Length	Weight
819-03	3.0 lbs. (1.36 kg)	15-3/4" (400.1 mm)	3.1 lbs. (1.41 kg)
819-04	4.0 lbs. (1.81 kg)	16" (406.4 mm)	4.1 lbs. (1.86 kg)





## Hammers

### Setting Hammer

- Durable epoxy resin handle helps to protect neck from fraying and splintering if incorrectly struck or over struck
- High-strength fiberglass shaft absorbs shock and keeps head tight
- Cushioned, PVC grip bonded to handle
- Special high-carbon steel, octagon shaped head with flat striking surface and rounded cross peen



820-16

Cat. No.	Head Weight	Overall Length	Weight
820-16	16.0 oz. (454 g)	13" (330.2 mm)	1.6 lbs. (0.73 kg)

### Riveting Hammer

- High-carbon steel round head is forged and hardened
- Flat striking surface with rounded cross peen
- Straight-grain American hickory handle is stained and lacquered



821-12

Cat. No.	Head Weight	Overall Length	Weight
821-12	12.0 oz. (340 g)	12-1/4" (311.2 mm)	1.1 lbs. (0.50 kg)

### Dead Blow Hammers

- Durable, abrasion resistant non-marring hammer face
- Increased striking force with zero impact rebound
- Design isolates user from striking impact and reduces fatigue
- 40% more driving power than other dead blow hammers
- Protects job surface from damage
- Applications: HVAC, metal fabrication, electronics, oil and mining, wood and metal assembly, automotive, aerospace
- When struck, the shot directs the striking power and increases the impact, creating a dead blow effect. The reduced rebound upon impact transfers full energy of the blow to the object being struck.



811-16

Cat. No.	Head Weight	Overall Length	Weight
811-16	16.0 oz. (454 g)	12-1/2" (317.5 mm)	1.4 lbs. (0.64 kg)
811-32	32.0 oz. (907 g)	18" (457.2 mm)	1.8 lbs. (0.82 kg)



## Chisels

### Cold Chisels



66142

- Heat-treated, high-carbon steel for necessary hardness and durability
- Cuts, shapes and removes metal
- Corrosion-resistant black finish

Cat. No.	Blade Width	Overall Length	Weight
66140	3/8" (9.5 mm)	5" (127.0 mm)	1.6 oz. (45 g)
66142	1/2" (12.7 mm)	6" (152.4 mm)	3.2 oz. (91 g)
66143	5/8" (15.9 mm)	6-1/2" (165.1 mm)	5.6 oz. (159 g)
66144	3/4" (19.1 mm)	7-1/2" (190.5 mm)	9.6 oz. (272 g)
66145	7/8" (22.2 mm)	8" (203.2 mm)	13.6 oz. (386 g)
66146	1" (25.4 mm)	8-1/2" (215.9 mm)	20.8 oz. (590 g)

### Cold Chisels-Long-Length



66177

- Heat-treated, high-carbon steel for necessary hardness and durability
- Cuts, shapes and removes metal
- Accurately ground edge and long length work better in hard-to-reach areas
- Corrosion-resistant black finish

Cat. No.	Blade Width	Overall Length	Weight
66174	1/2" (12.7 mm)	12" (304.8 mm)	6.4 oz. (181 g)
66177	3/4" (19.1 mm)	12" (304.8 mm)	1.1 lbs. (0.50 kg)
66183	1" (25.4 mm)	12" (304.8 mm)	2.1 lbs. (0.95 kg)



## Chisels

### Electrician's Chisel

- One-piece handle and blade forged of strong alloy steel
- Corrosion-resistant black finish extends to the polished blade edge



66100

Cat. No.	Blade Width	Overall Length	Weight
66100	2-3/4" (69.9 mm)	8" (203.2 mm)	1.1 lbs. (0.50 kg)

## Punches

### Drift Punches

- High-carbon steel for durability
- Rugged design for impact strength
- Strong, heat-treated points are smooth and precision tapered
- Corrosion-resistant black finish



66343

Cat. No.	Point Diameter	Taper	Overall Length	Weight
66340	0.125" (3.18 mm)	4-1/4" (108.0 mm)	8" (203.2 mm)	3.2 oz. (91 g)
66342	0.188" (4.76 mm)	5" (127.0 mm)	9" (228.6 mm)	5.6 oz. (159 g)
66343	1/4" (6.4 mm)	5-1/2" (139.7 mm)	11" (279.4 mm)	12.0 oz. (340 g)
66344	0.313" (7.9 mm)	5-1/2" (139.7 mm)	11" (279.4 mm)	12.0 oz. (340 g)

### Center Punches

- High-carbon steel for durability
- Rugged design for impact strength
- Smooth-ground points heat-treated to stay sharp and true longer
- Corrosion-resistant black finish



66313

Cat. No.	Shank Diameter	Overall Length	Weight
66310	1/4" (6.4 mm)	4-1/4" (108.0 mm)	0.8 oz. (23 g)
66311	5/16" (7.9 mm)	4-1/2" (114.3 mm)	1.6 oz. (45 g)
66312	3/8"	5" (127.0 mm)	1.6 oz. (45 g)
66313	1/2" (12.7 mm)	6" (152.4 mm)	4.0 oz. (113 g)

### Pin Punches

- High-carbon steel for durability
- Precision-ground shank
- Heat-treated for added strength and hardness at working end
- Corrosion-resistant black finish



66324

Cat. No.	Point Diameter	Overall Length	Weight
66320	.063" (1.59 mm)	4-1/4" (108.0 mm)	0.8 oz. (23 g)
66321	.094" (2.4 mm)	4-3/4" (120.7 mm)	1.6 oz. (45 g)
66322	0.125" (3.18 mm)	5" (127.0 mm)	1.6 oz. (45 g)
66323	0.156" (3.97 mm)	5-1/4" (133.4 mm)	1.6 oz. (45 g)
66324	0.188" (4.76 mm)	5-1/2" (139.7 mm)	1.6 oz. (45 g)
66325	1/4" (6.4 mm)	7" (177.8 mm)	3.2 oz. (91 g)




# Hammers, Chisels & Punches

Klein hammers, chisels and punches are designed and created to strike through jobsite challenges. Engineered with the professional in mind, each tool is job-matched to fit the task at hand.



For Professionals...  
Since 1857™



## Hammers

### Electrician's Straight-Claw Hammer

- Durable plastic-alloy jacketing helps to protect neck from fraying and splintering if incorrectly struck or overstruck
- High-strength fiberglass shaft absorbs shock and keeps head tight
- Comfortable, perforated neoprene grip bonded to handle
- Extra-long neck and narrow striking face are ideal for reaching into outlet boxes and other tight areas
- Balanced and designed specifically for use in electrical work

Cat. No.	Head Weight	Overall Length	Weight
807-18	18.0 oz. (510 g)	15" (381.0 mm)	1.9 lbs. (0.86 kg)



807-18

### Straight-Claw Hammers-Heavy-Duty

- Durable plastic-alloy jacketing helps to protect neck from fraying and splintering if incorrectly struck or overstruck
- High-strength fiberglass shaft absorbs shock and keeps head tight
- Comfortable, perforated neoprene grip bonded to handle
- Straight-claw design for easy nail pulling in tight quarters

Cat. No.	Head Weight	Overall Length	Weight
808-16	16.0 oz. (454 g)	13" (330.2 mm)	1.9 lbs. (0.86 kg)
808-20	20.0 oz. (567 g)	14" (355.6 mm)	2.0 lbs. (0.91 kg)



808-16

### Curved-Claw Hammers-Heavy-Duty

- Durable plastic-alloy jacketing helps to protect neck from fraying and splintering if incorrectly struck or overstruck
- High-strength fiberglass shaft absorbs shock and keeps head tight
- Comfortable, perforated neoprene grip bonded to handle
- Curved claw gives maximum nail-pulling leverage

Cat. No.	Head Weight	Overall Length	Weight
818-16	16.0 oz. (454 g)	13" (330.2 mm)	1.9 lbs. (0.86 kg)
818-20	20.0 oz. (567 g)	14" (355.6 mm)	2.0 lbs. (0.91 kg)



818-16

### Lineman's Straight-Claw Hammer

- Heavy-duty, double-duty hammer drives lags and pulls large nails
- Special high-carbon steel head with solid, octagon-shaped driving end and thick, strong claw
- Straight-grain hickory handle, lacquered to withstand weather

Cat. No.	Head Weight	Overall Length	Weight
832-32	32.0 oz. (907 g)	15" (381.0 mm)	2.5 lbs. (1.13 kg)



832-32

See page 310 for additional information on warnings.



For Sledge, Brass, Copper + Normalized Hammers, see Mining Tools section

## Hammers

### Ball-Peen Hammers

- Forged high-carbon steel head is hardened for additional durability
- Crowned face with uniform bevel
- Smoothly rounded peen
- Straight-grain hickory handle is stained and lacquered to withstand weather



803-12

Cat. No.	Head Weight	Overall Length	Weight
803-8	8.0 oz. (227 g)	11-1/2" (292.1 mm)	12.0 oz. (340 g)
803-12	12.0 oz. (340 g)	12-1/2" (317.5 mm)	1.1 lbs. (0.50 kg)
803-16	16.0 oz. (454 g)	13-1/2" (342.9 mm)	1.4 lbs. (0.64 kg)
803-24	24.0 oz. (680 g)	15" (381.0 mm)	1.9 lbs. (0.86 kg)
803-32	32.0 oz. (907 g)	15" (381.0 mm)	2.5 lbs. (1.13 kg)

### Hand-Drilling Hammer

- Extra-heavy, forged steel head, hardened and tempered
- Short handle for working in close quarters
- Select hickory handle, triple-wedged and lacquered to withstand weather
- Special handle treatment removes handle moisture and replaces it with oil to help eliminate the effects of extreme temperatures



823-48

Cat. No.	Head Weight	Overall Length	Weight
823-48	48 oz. (1361 g)	10" (254.0 mm)	3.3 lbs. (1.50 kg)

### Lineman's Double-Face Hammer

- Designed for pole-line work
- Rugged and well-balanced, with the weight to drive lag bolts
- Faces with 1-3/4" (44 mm) round-crown driving surface and beveled edges
- Cat. No. 809-36MF has one milled face for driving staples used in pole-line work and common, unhardened nails
- Forged, tempered-steel head is only 3-3/4" (95 mm) long for use in tight areas



809-36

Cat. No.	Head Weight	Overall Length	Weight
809-36	36 oz. (1021 g)	14" (355.6 mm)	2.5 lbs. (1.13 kg)
809-36MF	36 oz. (1021 g)	14" (355.6 mm)	2.5 lbs. (1.13 kg)



809-36  
both sides

809-36MF  
one side

### Non-Sparking Hammers

- Non-sparking, non-marring brass-head hammers
- Fiberglass handle includes TPR overmold for extra comfort and shock absorption.
- Built-in overstrike protector absorbs shock and vibration when overstrike occurs
- Large sweep at base prevents loss of grip
- Head is securely epoxied to prevent detachment
- Does not contain beryllium




819-03

Cat. No.	Head Weight	Overall Length	Weight
819-03	3.0 lbs. (1.36 kg)	15-3/4" (400.1 mm)	3.1 lbs. (1.41 kg)
819-04	4.0 lbs. (1.81 kg)	16" (406.4 mm)	4.1 lbs. (1.86 kg)







## Hammers

### Setting Hammer

- Durable epoxy resin handle helps to protect neck from fraying and splintering if incorrectly struck or over struck
- High-strength fiberglass shaft absorbs shock and keeps head tight
- Cushioned, PVC grip bonded to handle
- Special high-carbon steel, octagon shaped head with flat striking surface and rounded cross peen



820-16

Cat. No.	Head Weight	Overall Length	Weight
820-16	16.0 oz. (454 g)	13" (330.2 mm)	1.6 lbs. (0.73 kg)

### Riveting Hammer

- High-carbon steel round head is forged and hardened
- Flat striking surface with rounded cross peen
- Straight-grain American hickory handle is stained and lacquered




821-12

Cat. No.	Head Weight	Overall Length	Weight
821-12	12.0 oz. (340 g)	12-1/4" (311.2 mm)	1.1 lbs. (0.50 kg)

### Dead Blow Hammers

- Durable, abrasion resistant non-marring hammer face
- Increased striking force with zero impact rebound
- Design isolates user from striking impact and reduces fatigue
- 40% more driving power than other dead blow hammers
- Protects job surface from damage
- Applications: HVAC, metal fabrication, electronics, oil and mining, wood and metal assembly, automotive, aerospace
- When struck, the shot directs the striking power and increases the impact, creating a dead blow effect. The reduced rebound upon impact transfers full energy of the blow to the object being struck.

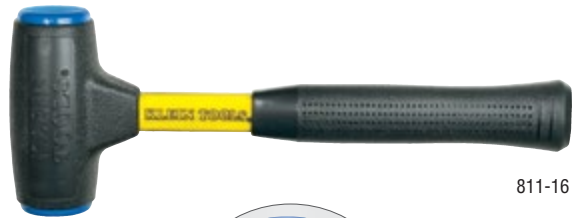

811-16



Cat. No.	Head Weight	Overall Length	Weight
811-16	16.0 oz. (454 g)	12-1/2" (317.5 mm)	1.4 lbs. (0.64 kg)
811-32	32.0 oz. (907 g)	18" (457.2 mm)	1.8 lbs. (0.82 kg)

## Chisels

### Cold Chisels



66142

- Heat-treated, high-carbon steel for necessary hardness and durability
- Cuts, shapes and removes metal
- Corrosion-resistant black finish

Cat. No.	Blade Width	Overall Length	Weight
66140	3/8" (9.5 mm)	5" (127.0 mm)	1.6 oz. (45 g)
66142	1/2" (12.7 mm)	6" (152.4 mm)	3.2 oz. (91 g)
66143	5/8" (15.9 mm)	6-1/2" (165.1 mm)	5.6 oz. (159 g)
66144	3/4" (19.1 mm)	7-1/2" (190.5 mm)	9.6 oz. (272 g)
66145	7/8" (22.2 mm)	8" (203.2 mm)	13.6 oz. (386 g)
66146	1" (25.4 mm)	8-1/2" (215.9 mm)	20.8 oz. (590 g)

### Cold Chisels-Long-Length



66177

- Heat-treated, high-carbon steel for necessary hardness and durability
- Cuts, shapes and removes metal
- Accurately ground edge and long length work better in hard-to-reach areas
- Corrosion-resistant black finish

Cat. No.	Blade Width	Overall Length	Weight
66174	1/2" (12.7 mm)	12" (304.8 mm)	6.4 oz. (181 g)
66177	3/4" (19.1 mm)	12" (304.8 mm)	1.1 lbs. (0.50 kg)
66183	1" (25.4 mm)	12" (304.8 mm)	2.1 lbs. (0.95 kg)



## Chisels

### Electrician's Chisel

- One-piece handle and blade forged of strong alloy steel
- Corrosion-resistant black finish extends to the polished blade edge



66100

Cat. No.	Blade Width	Overall Length	Weight
66100	2-3/4" (69.9 mm)	8" (203.2 mm)	1.1 lbs. (0.50 kg)

## Punches

### Drift Punches

- High-carbon steel for durability
- Rugged design for impact strength
- Strong, heat-treated points are smooth and precision tapered
- Corrosion-resistant black finish



66343

Cat. No.	Point Diameter	Taper	Overall Length	Weight
66340	0.125" (3.18 mm)	4-1/4" (108.0 mm)	8" (203.2 mm)	3.2 oz. (91 g)
66342	0.188" (4.76 mm)	5" (127.0 mm)	9" (228.6 mm)	5.6 oz. (159 g)
66343	1/4" (6.4 mm)	5-1/2" (139.7 mm)	11" (279.4 mm)	12.0 oz. (340 g)
66344	0.313" (7.9 mm)	5-1/2" (139.7 mm)	11" (279.4 mm)	12.0 oz. (340 g)

### Center Punches

- High-carbon steel for durability
- Rugged design for impact strength
- Smooth-ground points heat-treated to stay sharp and true longer
- Corrosion-resistant black finish



66313

Cat. No.	Shank Diameter	Overall Length	Weight
66310	1/4" (6.4 mm)	4-1/4" (108.0 mm)	0.8 oz. (23 g)
66311	5/16" (7.9 mm)	4-1/2" (114.3 mm)	1.6 oz. (45 g)
66312	3/8"	5" (127.0 mm)	1.6 oz. (45 g)
66313	1/2" (12.7 mm)	6" (152.4 mm)	4.0 oz. (113 g)

### Pin Punches

- High-carbon steel for durability
- Precision-ground shank
- Heat-treated for added strength and hardness at working end
- Corrosion-resistant black finish



66324

Cat. No.	Point Diameter	Overall Length	Weight
66320	.063" (1.59 mm)	4-1/4" (108.0 mm)	0.8 oz. (23 g)
66321	.094" (2.4 mm)	4-3/4" (120.7 mm)	1.6 oz. (45 g)
66322	0.125" (3.18 mm)	5" (127.0 mm)	1.6 oz. (45 g)
66323	0.156" (3.97 mm)	5-1/4" (133.4 mm)	1.6 oz. (45 g)
66324	0.188" (4.76 mm)	5-1/2" (139.7 mm)	1.6 oz. (45 g)
66325	1/4" (6.4 mm)	7" (177.8 mm)	3.2 oz. (91 g)

