




RP







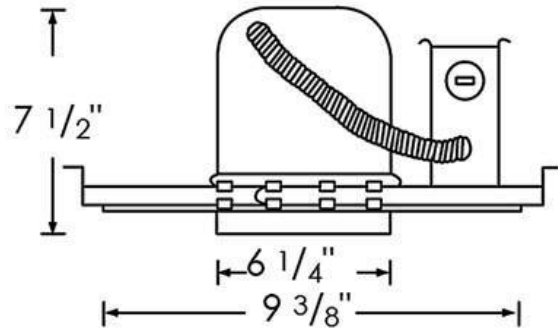









LIGHTING • FANS








| |
|--------------|
| Type: |
| Project: |
| Comments: |
| Prepared By: |

| | |
|---|--|
| Part # | 8102HAQ-K |
| Category #: | 8102 |
| Family: | Recessed |
| Product Category: | Recessed Down Light |
| Description: | 6" Airtight Incandescent Recessed Down Light w/ socket bracket |
| Design Features | |
| Connectors | 3 part quick connectors pre installed in all J Boxes |
| Construction | New construction |
| Thermal Protection | Protected against misuse of insulation and improper wiring |
| IC Rating | IC rated for direct contact with non cellulose type insulation |
| J Box | UL Listed for feed through wiring (4 in-4 out) and seven 1/2" knockouts |
| Bar hangers | Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings. |
| Nails | Pre installed captive nails on bar hangers |
| Wattage | Up to 90W |
| Voltage | 120V-60Hz |
| Warranty | 1 year limited warranty |
| Lamp | A19, PAR30/38, BR30/38, LED retro |
| Listing | |
| ETL/UL | UL certified for damp location |
| Meets Washington's State energy code for restricted airflow | |



Trim Options

| | Type | Item# | Finishes | O.D. |
|---|--|---------------|---|------|
|  | Open Trim 150W Max, PAR38/BR40 | 8501 | White | 8" |
|  | Shower, Lexan, Fresnel Lens 40W Max, A19 | 8502FS- BR | Wet location listed Socket Bracket Included Metal trim ring available | 8" |
|  | Black Baffle 150W Max, PAR38/BR40 | 8503 | Black Optional BA, BK, rings | 8" |
|  | Black Baffle 75W Max PAR30/BR30 | 8504 | Black Optional Brushed Aluminum and black rings | 8" |
|  | Lexan Flat Opal Albalite Lens 60W Max, A19 | 8505AL | White | 8" |
|  | Eyeball 75W Max, PAR30/BR30 | 8506 | White and Black | 8" |
|  | Open Trim 75W Max, PAR30/BR30 | 8508 | Brushed aluminum and | 8" |
|  | Lexan Drop Opal 60W Max, A19 | 8509DR- BR | Wet location listed Socket Bracket Included Metal trim ring available | 8" |
|  | White Baffle 150W Max, PAR38/BR40 | 8510 | White Optional BA, BK, OB rings | 8" |
|  | White Baffle 75W Max, PAR30/BR30 | 8511 | White Optional BA, BK, OB rings | 8" |
|  | Specular Reflector 75W Max, PAR30/BR30 | 8513 | Finishes: Clear Black and White | 8" |
|  | Reflector 150W Max, PAR38/BR40 | 8515 | Clear and Brushed Aluminum Optional BA, BK rings | 8" |
|  | Regressed Eyeball, w/ Baffle 75W Max PAR30/BR30 | 8516 | White | 8" |
|  | Wall Wash 60W Max, A19 | 8517WW | White | 8" |
|  | Reflector 100W Max, A19 | 8518 | Brushed aluminum, clear and white Optional BA, BK, PB rings | 8" |
|  | Cone, Baffle 100W Max PAR30/BR30/A19 PAR38/BR40 | 8519 | Black and white | 8" |

| | | | | |
|---|---|------|---|----|
|  | Fresnel Lens w/Baffle 40W Max, A19 | 8522 | White | 8" |
|  | Wall Wash 60W Max, A19 | 8527 | CL w/Clear Reflector WH w/White Baffle | 8" |
|  | Baffle, w/Clear Reflector 75W Max PAR30/BR30 | 8534 | White | 8" |
|  | Reflector 75W Max PAR30/BR30 | 8535 | Clear | 8" |
|  | Shower Trim w/Regressed Drop Opal Lens 40W Max, A19 | 8537 | Wet location listed White | 8" |
|  | Gimbal 75W Max, PAR30 | 8540 | Black, white and oil rubbed bronze | 8" |
|  | Splay 40W Max, A19 | 8546 | White | 8" |

Additional Information

1. Socket is adjustable for proper positioning of different lamps types.
2. Adjusts to fit up to 1-1/4" ceiling thickness.
3. 7-1/2" height allows use in 2" x 8" joist construction.




RP







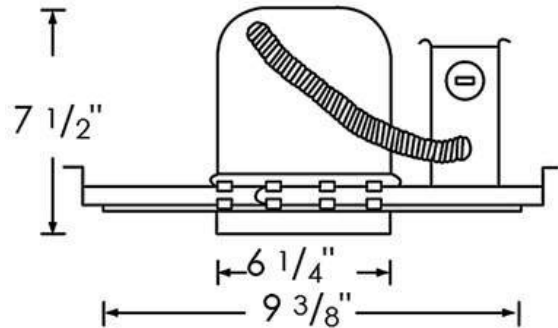









LIGHTING • FANS








| |
|--------------|
| Type: |
| Project: |
| Comments: |
| Prepared By: |

| | |
|---|--|
| Part # | 8102HAQ-K |
| Category #: | 8102 |
| Family: | Recessed |
| Product Category: | Recessed Down Light |
| Description: | 6" Airtight Incandescent Recessed Down Light w/ socket bracket |
| Design Features | |
| Connectors | 3 part quick connectors pre installed in all J Boxes |
| Construction | New construction |
| Thermal Protection | Protected against misuse of insulation and improper wiring |
| IC Rating | IC rated for direct contact with non cellulose type insulation |
| J Box | UL Listed for feed through wiring (4 in-4 out) and seven 1/2" knockouts |
| Bar hangers | Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings. |
| Nails | Pre installed captive nails on bar hangers |
| Wattage | Up to 90W |
| Voltage | 120V-60Hz |
| Warranty | 1 year limited warranty |
| Lamp | A19, PAR30/38, BR30/38, LED retro |
| Listing | |
| ETL/UL | UL certified for damp location |
| Meets Washington's State energy code for restricted airflow | |



Trim Options

| | Type | Item# | Finishes | O.D. |
|---|--|---------------|---|------|
|  | Open Trim 150W Max, PAR38/BR40 | 8501 | White | 8" |
|  | Shower, Lexan, Fresnel Lens 40W Max, A19 | 8502FS- BR | Wet location listed Socket Bracket Included Metal trim ring available | 8" |
|  | Black Baffle 150W Max, PAR38/BR40 | 8503 | Black Optional BA, BK, rings | 8" |
|  | Black Baffle 75W Max PAR30/BR30 | 8504 | Black Optional Brushed Aluminum and black rings | 8" |
|  | Lexan Flat Opal Albalite Lens 60W Max, A19 | 8505AL | White | 8" |
|  | Eyeball 75W Max, PAR30/BR30 | 8506 | White and Black | 8" |
|  | Open Trim 75W Max, PAR30/BR30 | 8508 | Brushed aluminum and | 8" |
|  | Lexan Drop Opal 60W Max, A19 | 8509DR- BR | Wet location listed Socket Bracket Included Metal trim ring available | 8" |
|  | White Baffle 150W Max, PAR38/BR40 | 8510 | White Optional BA, BK, OB rings | 8" |
|  | White Baffle 75W Max, PAR30/BR30 | 8511 | White Optional BA, BK, OB rings | 8" |
|  | Specular Reflector 75W Max, PAR30/BR30 | 8513 | Finishes: Clear Black and White | 8" |
|  | Reflector 150W Max, PAR38/BR40 | 8515 | Clear and Brushed Aluminum Optional BA, BK rings | 8" |
|  | Regressed Eyeball, w/ Baffle 75W Max PAR30/BR30 | 8516 | White | 8" |
|  | Wall Wash 60W Max, A19 | 8517WW | White | 8" |
|  | Reflector 100W Max, A19 | 8518 | Brushed aluminum, clear and white Optional BA, BK, PB rings | 8" |
|  | Cone, Baffle 100W Max PAR30/BR30/A19 PAR38/BR40 | 8519 | Black and white | 8" |

| | | | | |
|---|---|------|---|----|
|  | Fresnel Lens w/Baffle 40W Max, A19 | 8522 | White | 8" |
|  | Wall Wash 60W Max, A19 | 8527 | CL w/Clear Reflector WH w/White Baffle | 8" |
|  | Baffle, w/Clear Reflector 75W Max PAR30/BR30 | 8534 | White | 8" |
|  | Reflector 75W Max PAR30/BR30 | 8535 | Clear | 8" |
|  | Shower Trim w/Regressed Drop Opal Lens 40W Max, A19 | 8537 | Wet location listed White | 8" |
|  | Gimbal 75W Max, PAR30 | 8540 | Black, white and oil rubbed bronze | 8" |
|  | Splay 40W Max, A19 | 8546 | White | 8" |

Additional Information

1. Socket is adjustable for proper positioning of different lamps types.
2. Adjusts to fit up to 1-1/4" ceiling thickness.
3. 7-1/2" height allows use in 2" x 8" joist construction.