


SINGLE-USE WIRE GRABBER™


Continued

SU 500 MCM

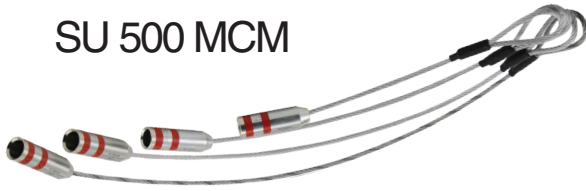


| Code | Description | Qty. |
|-------|---------------------------|------|
| 98173 | SU500MCM 14" wire lanyard | 6 |
| 98174 | SU500MCM 21" wire lanyard | 6 |
| 98175 | SU500MCM 28" wire lanyard | 6 |
| 98176 | SU500MCM 35" wire lanyard | 6 |

SU 600 MCM

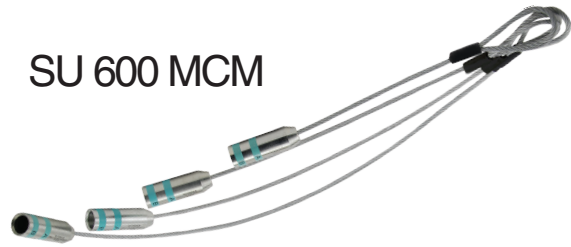

| Code | Description | Qty. |
|-------|---------------------------|------|
| 98177 | SU600MCM 14" wire lanyard | 6 |
| 98178 | SU600MCM 21" wire lanyard | 6 |
| 98179 | SU600MCM 28" wire lanyard | 6 |
| 98180 | SU600MCM 35" wire lanyard | 6 |

SU 750 MCM

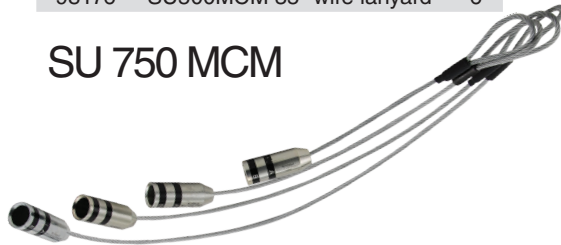

| Code | Description | Qty. |
|-------|---------------------------|------|
| 98181 | SU750MCM 14" wire lanyard | 6 |
| 98182 | SU750MCM 21" wire lanyard | 6 |
| 98183 | SU750MCM 28" wire lanyard | 6 |
| 98184 | SU750MCM 35" wire lanyard | 6 |

SU 1000 MCM



| Code | Description | Qty. |
|-------|----------------------------|------|
| 98185 | SU1000MCM 14" wire lanyard | 6 |
| 98186 | SU1000MCM 21" wire lanyard | 6 |
| 98187 | SU1000MCM 28" wire lanyard | 6 |
| 98188 | SU1000MCM 35" wire lanyard | 6 |

SINGLE-USE WIRE GRABBER™ LOAD CHART

| WIRE GRABBER™ SPECIFICATIONS FOR COPPER & ALUMINUM WIRE | | | | | | | | | | | |
|---|-----------|----------------|------------|-------------------------|-------------------------|-------------------------------|---------|---------|---------|---------|---|
| Single-Use Wire Grabber™ | Wire Size | Max Load (lbs) | | Min conductor dia. (in) | Max conductor dia. (in) | Minimum EMT Conduit Size (in) | | | | | Crimper |
| | | One Tool | Five Tools | | | 1 Wire | 2 Wires | 3 Wires | 4 Wires | 5 Wires | |
| SU 8 | 8 AWG | 130 | 650 | 0.134 | 0.146 | - | - | - | - | - | 12 to 15 ton Die Crimper or Dieless Crimper |
| SU 6 | 6 AWG | 210 | 1050 | 0.169 | 0.184 | - | - | - | - | - | |
| SU 4 | 4 AWG | 300 | 1500 | 0.213 | 0.232 | - | - | - | - | - | |
| SU 3 | 3 AWG | 400 | 2000 | 0.238 | 0.260 | - | - | - | - | - | |
| SU 2 | 2 AWG | 500 | 2500 | 0.268 | 0.292 | - | - | - | - | - | |
| SU 1 | 1 AWG | 669 | 3345 | 0.299 | 0.332 | - | - | - | - | - | |
| SU 1/0 | 1/0 AWG | 844 | 4220 | 0.336 | 0.373 | 1 | 1-¼ | 1-¼ | 1-½ | 2 | |
| SU 2/0 | 2/0 AWG | 1000 | 5000 | 0.376 | 0.419 | 1 | 1-¼ | 1-½ | 2 | 2 | |
| SU 3/0 | 3/0 AWG | 1250 | 6250 | 0.423 | 0.470 | 1 | 1-½ | 1-½ | 2 | 2-½ | |
| SU 4/0 | 4/0 AWG | 1650 | 8250 | 0.475 | 0.528 | 1-¼ | 1-½ | 2 | 2 | 2-½ | |
| SU 250 | 250 MCM | 2000 | 10000 | 0.520 | 0.575 | 1-¼ | 2 | 2 | 2-½ | 2-½ | |
| SU 300 | 300 MCM | 2400 | 12000 | 0.570 | 0.631 | 1-¼ | 2 | 2 | 2-½ | 2-½ | |
| SU 350 | 350 MCM | 2400 | 12000 | 0.616 | 0.681 | 1-½ | 2 | 2-½ | 2-½ | 3 | |
| SU 400 | 400 MCM | 2400 | 12000 | 0.659 | 0.728 | 1-½ | 2-½ | 2-½ | 2-½ | 3 | |
| SU 500 | 500 MCM | 4000 | 20000 | 0.736 | 0.813 | 1-½ | 2-½ | 2-½ | 3 | 3-½ | |
| SU 600 | 600 MCM | 4200 | 21000 | 0.813 | 0.893 | 2 | 2-½ | 3 | 3 | 3-½ | |
| SU 750 | 750 MCM | 4300 | 21500 | 0.908 | 0.998 | 2 | 3 | 3 | 3-½ | 4 | |
| SU 1000 | 1000 MCM | 5000 | 25000 | 1.060 | 1.153 | 2 | 3 | 3-½ | 4 | 4-½ | 15 ton Die Crimper |


For use on THHN & XHHN copper & aluminum wire only.

*May require special service (such as removing bushing and installing extra guide pulleys) when pulling Max diameter wires through Min size conduit.

SINGLE-USE WIRE GRABBER™


Continued

SU 500 MCM

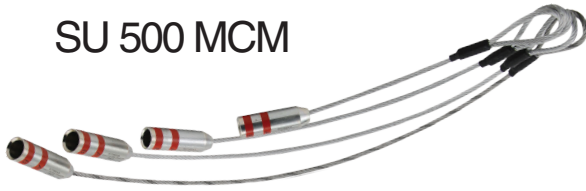


| Code | Description | Qty. |
|-------|---------------------------|------|
| 98173 | SU500MCM 14" wire lanyard | 6 |
| 98174 | SU500MCM 21" wire lanyard | 6 |
| 98175 | SU500MCM 28" wire lanyard | 6 |
| 98176 | SU500MCM 35" wire lanyard | 6 |

SU 600 MCM

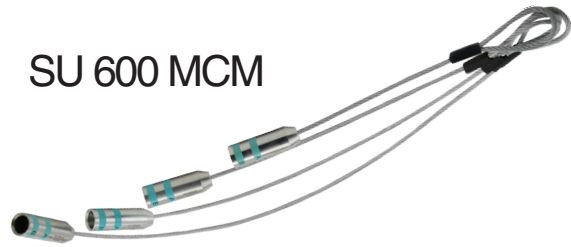

| Code | Description | Qty. |
|-------|---------------------------|------|
| 98177 | SU600MCM 14" wire lanyard | 6 |
| 98178 | SU600MCM 21" wire lanyard | 6 |
| 98179 | SU600MCM 28" wire lanyard | 6 |
| 98180 | SU600MCM 35" wire lanyard | 6 |

SU 750 MCM

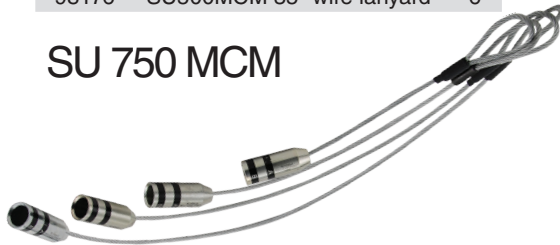

| Code | Description | Qty. |
|-------|---------------------------|------|
| 98181 | SU750MCM 14" wire lanyard | 6 |
| 98182 | SU750MCM 21" wire lanyard | 6 |
| 98183 | SU750MCM 28" wire lanyard | 6 |
| 98184 | SU750MCM 35" wire lanyard | 6 |

SU 1000 MCM



| Code | Description | Qty. |
|-------|----------------------------|------|
| 98185 | SU1000MCM 14" wire lanyard | 6 |
| 98186 | SU1000MCM 21" wire lanyard | 6 |
| 98187 | SU1000MCM 28" wire lanyard | 6 |
| 98188 | SU1000MCM 35" wire lanyard | 6 |

SINGLE-USE WIRE GRABBER™ LOAD CHART

| WIRE GRABBER™ SPECIFICATIONS FOR COPPER & ALUMINUM WIRE | | | | | | | | | | | |
|---|-----------|----------------|------------|-------------------------|-------------------------|-------------------------------|---------|---------|---------|---------|---|
| Single-Use Wire Grabber™ | Wire Size | Max Load (lbs) | | Min conductor dia. (in) | Max conductor dia. (in) | Minimum EMT Conduit Size (in) | | | | | Crimper |
| | | One Tool | Five Tools | | | 1 Wire | 2 Wires | 3 Wires | 4 Wires | 5 Wires | |
| SU 8 | 8 AWG | 130 | 650 | 0.134 | 0.146 | - | - | - | - | - | 12 to 15 ton Die Crimper or Dieless Crimper |
| SU 6 | 6 AWG | 210 | 1050 | 0.169 | 0.184 | - | - | - | - | - | |
| SU 4 | 4 AWG | 300 | 1500 | 0.213 | 0.232 | - | - | - | - | - | |
| SU 3 | 3 AWG | 400 | 2000 | 0.238 | 0.260 | - | - | - | - | - | |
| SU 2 | 2 AWG | 500 | 2500 | 0.268 | 0.292 | - | - | - | - | - | |
| SU 1 | 1 AWG | 669 | 3345 | 0.299 | 0.332 | - | - | - | - | - | |
| SU 1/0 | 1/0 AWG | 844 | 4220 | 0.336 | 0.373 | 1 | 1-¼ | 1-¼ | 1-½ | 2 | |
| SU 2/0 | 2/0 AWG | 1000 | 5000 | 0.376 | 0.419 | 1 | 1-¼ | 1-½ | 2 | 2 | |
| SU 3/0 | 3/0 AWG | 1250 | 6250 | 0.423 | 0.470 | 1 | 1-½ | 1-½ | 2 | 2-½ | |
| SU 4/0 | 4/0 AWG | 1650 | 8250 | 0.475 | 0.528 | 1-¼ | 1-½ | 2 | 2 | 2-½ | |
| SU 250 | 250 MCM | 2000 | 10000 | 0.520 | 0.575 | 1-¼ | 2 | 2 | 2-½ | 2-½ | |
| SU 300 | 300 MCM | 2400 | 12000 | 0.570 | 0.631 | 1-¼ | 2 | 2 | 2-½ | 2-½ | |
| SU 350 | 350 MCM | 2400 | 12000 | 0.616 | 0.681 | 1-½ | 2 | 2-½ | 2-½ | 3 | |
| SU 400 | 400 MCM | 2400 | 12000 | 0.659 | 0.728 | 1-½ | 2-½ | 2-½ | 2-½ | 3 | |
| SU 500 | 500 MCM | 4000 | 20000 | 0.736 | 0.813 | 1-½ | 2-½ | 2-½ | 3 | 3-½ | |
| SU 600 | 600 MCM | 4200 | 21000 | 0.813 | 0.893 | 2 | 2-½ | 3 | 3 | 3-½ | |
| SU 750 | 750 MCM | 4300 | 21500 | 0.908 | 0.998 | 2 | 3 | 3 | 3-½ | 4 | |
| SU 1000 | 1000 MCM | 5000 | 25000 | 1.060 | 1.153 | 2 | 3 | 3-½ | 4 | 4-½ | 15 ton Die Crimper |

For use on THHN & XHHN copper & aluminum wire only.

*May require special service (such as removing bushing and installing extra guide pulleys) when pulling Max diameter wires through Min size conduit.