

- Unique Guide-Rite Fastener provides for fast and easy installation.
- Fasteners will rotate 360°.
- Simply installed with a hammer and pliers.


## Guide-Rite™ Conduit To Beam Fasteners



UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101118450	<b>BG-6-U-2-4*</b>	3/8"	1/8" - 1/4"	100
78101118455	<b>BG-6-U-5-8*</b>	3/8"	5/16" - 1/2"	100
78101118460	<b>BG-6-U-9-12*</b>	3/8"	9/16" - 3/4"	100
78101118525	<b>BG-8-12-U-2-4</b>	1/2", 3/4"	1/8" - 1/4"	100
78101118530	<b>BG-8-12-U-5-8</b>	1/2", 3/4"	5/16" - 1/2"	100
78101118535	<b>BG-8-12-U-9-12</b>	1/2", 3/4"	9/16" - 3/4"	100
78101118625	<b>BG-16-U-2-4</b>	1"	1/8" - 1/4"	100
78101118630	<b>BG-16-U-5-8</b>	1"	5/16" - 1/2"	100
78101118635	<b>BG-16-U-9-12</b>	1"	9/16" - 3/4"	100
78101118680	<b>BG-20-U-2-4</b>	1 1/4"	1/8" - 1/4"	100
78101118685	<b>BG-20-U-5-8</b>	1 1/4"	5/16" - 1/2"	100
78101118690	<b>BG-20-U-9-12</b>	1 1/4"	9/16" - 3/4"	100
78101118720	<b>BG-24-U-2-4</b>	1 1/2"	1/8" - 1/4"	50
78101118725	<b>BG-24-U-5-8</b>	1 1/2"	5/16" - 1/2"	50
78101118730	<b>BG-24-U-9-12</b>	1 1/2"	9/16" - 3/4"	50
78101118760	<b>BG-32-U-2-4</b>	2"	1/8" - 1/4"	50
78101118765	<b>BG-32-U-5-8</b>	2"	5/16" - 1/2"	50
78101118770	<b>BG-32-U-9-12</b>	2"	9/16" - 3/4"	50

Patent #4958792


\* BG-6 will accept the following range  $\varnothing.420 - \varnothing.675$ : 14/2 thru 10/4 MC/AC cable and 5/16" or 3/8" flexible conduit



**Static Load Capacity**

75 Lbs.

Read safety/installation instruction sheets in packages before use.  
These products are designed for positioning only. No load rating.

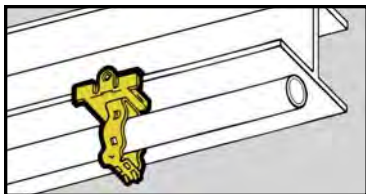

- Unique Guide-Rite Fastener provides for fast and easy installation.
- Fasteners will rotate 360°.
- Simply installed with a hammer and pliers.


## Guide-Rite™ Conduit To Beam Fasteners



UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101118450	<b>BG-6-U-2-4*</b>	3/8"	1/8" - 1/4"	100
78101118455	<b>BG-6-U-5-8*</b>	3/8"	5/16" - 1/2"	100
78101118460	<b>BG-6-U-9-12*</b>	3/8"	9/16" - 3/4"	100
78101118525	<b>BG-8-12-U-2-4</b>	1/2", 3/4"	1/8" - 1/4"	100
78101118530	<b>BG-8-12-U-5-8</b>	1/2", 3/4"	5/16" - 1/2"	100
78101118535	<b>BG-8-12-U-9-12</b>	1/2", 3/4"	9/16" - 3/4"	100
78101118625	<b>BG-16-U-2-4</b>	1"	1/8" - 1/4"	100
78101118630	<b>BG-16-U-5-8</b>	1"	5/16" - 1/2"	100
78101118635	<b>BG-16-U-9-12</b>	1"	9/16" - 3/4"	100
78101118680	<b>BG-20-U-2-4</b>	1 1/4"	1/8" - 1/4"	100
78101118685	<b>BG-20-U-5-8</b>	1 1/4"	5/16" - 1/2"	100
78101118690	<b>BG-20-U-9-12</b>	1 1/4"	9/16" - 3/4"	100
78101118720	<b>BG-24-U-2-4</b>	1 1/2"	1/8" - 1/4"	50
78101118725	<b>BG-24-U-5-8</b>	1 1/2"	5/16" - 1/2"	50
78101118730	<b>BG-24-U-9-12</b>	1 1/2"	9/16" - 3/4"	50
78101118760	<b>BG-32-U-2-4</b>	2"	1/8" - 1/4"	50
78101118765	<b>BG-32-U-5-8</b>	2"	5/16" - 1/2"	50
78101118770	<b>BG-32-U-9-12</b>	2"	9/16" - 3/4"	50

Patent #4958792

\* BG-6 will accept the following range  $\varnothing.420 - \varnothing.675$ : 14/2 thru 10/4 MC/AC cable and 5/16" or 3/8" flexible conduit



**Static Load Capacity**

75 Lbs.

Read safety/installation instruction sheets in packages before use.  
These products are designed for positioning only. No load rating.