

LED Emergency Light

FEATURES

- Emergency unit for commercial applications
- Includes optional Self-Test/Self-Diagnostic models
- UV stable thermoplastic white or black housing available
- Quick installation with fully adjustable lamp-heads
- LED Lamps with a life-cycle of more than 10 years
- Dual-voltage 120 or 277V AC input
- Remote capacity or extended runtime option
- Long-life Nickel Cadmium battery with fully automatic charger
- UL 924 Damp Location Listed



EMERGENCY LIGHTING

ORDERING INFORMATION

| CATALOG NUMBER | DESCRIPTION |
|----------------|---|
| CU2 | White Thermoplastic, Dual-Head LED Emergency Light , 120/277 Input, Damp Location Listed, 3 VDC, 1 Watt |
| CU2B | Black Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, 3 VDC, 1 Watt |
| CU2RC | White Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, Remote Capacity, 3 VDC, 1 Watt |
| CU2RCB | Black Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, Remote Capacity, 3 VDC, 1 Watt |
| CU2SD | White Thermoplastic, Dual-Head LED Emergency Light , 120/277VAC, Damp Listed, 3 VDC, 1 Watt, Self-Test/Self-Diagnostics |
| CU2RCS | White Thermoplastic, Dual-Head LED Emergency Light, 120/277VAC, Damp Listed, Remote Capacity, 3VDC, 1Watt, Self-Test/Self-Diagnostics |

Note: Remote Capacity Unit will only power the Compass Indoor and Outdoor Remote(CIR and COR Series)

MATCHING REMOTE FIXTURES

| MODEL | DESCRIPTION |
|-------|--------------------------|
| CIR | LED Indoor Remote Heads |
| COR | LED Outdoor Remote Heads |

ACCESSORIES

| MODEL | DESCRIPTION |
|-------|-----------------------------------|
| WGLZ | Wireguard- 6.25" H X 14" W X 4" D |



CU2B


ELECTRONICS

- 90 minute emergency operation
- Test switch and LED AC-on indicator light

SELF-DIAGNOSTIC FEATURES

- Fault identification for battery, charger, LED integral lamps and remotes
- Self-Testing monthly and annual for 90 minutes
- Manual testing for 30 second, 15 minute and 90 minutes

Single Carton Weight: 1 lbs.
Master Carton Quantity: 12 each

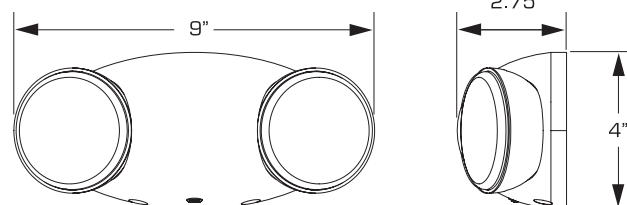

FEATURES

- Emergency unit for commercial applications
- Includes optional Self-Test/Self-Diagnostic models
- UV stable thermoplastic white or black housing available
- Quick installation with fully adjustable lamp-heads
- LED Lamps with a life-cycle of more than 10 years
- Dual-voltage 120 or 277V AC input
- Remote capacity or extended runtime option
- Long-life Nickel Cadmium battery with fully automatic charger
- UL 924 Damp Location Listed



EMERGENCY LIGHTING

ORDERING INFORMATION

| CATALOG NUMBER | DESCRIPTION |
|----------------|---|
| CU2 | White Thermoplastic, Dual-Head LED Emergency Light , 120/277 Input, Damp Location Listed, 3 VDC, 1 Watt |
| CU2B | Black Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, 3 VDC, 1 Watt |
| CU2RC | White Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, Remote Capacity, 3 VDC, 1 Watt |
| CU2RCB | Black Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, Remote Capacity, 3 VDC, 1 Watt |
| CU2SD | White Thermoplastic, Dual-Head LED Emergency Light , 120/277VAC, Damp Listed, 3 VDC, 1 Watt, Self-Test/Self-Diagnostics |
| CU2RCS | White Thermoplastic, Dual-Head LED Emergency Light, 120/277VAC, Damp Listed, Remote Capacity, 3VDC, 1Watt, Self-Test/Self-Diagnostics |

Note: Remote Capacity Unit will only power the Compass Indoor and Outdoor Remote(CIR and COR Series)

MATCHING REMOTE FIXTURES

| MODEL | DESCRIPTION |
|-------|--------------------------|
| CIR | LED Indoor Remote Heads |
| COR | LED Outdoor Remote Heads |



CU2B

ACCESSORIES

| MODEL | DESCRIPTION |
|-------|-----------------------------------|
| WGLZ | Wireguard- 6.25" H X 14" W X 4" D |

ELECTRONICS

- 90 minute emergency operation
- Test switch and LED AC-on indicator light

SELF-DIAGNOSTIC FEATURES

- Fault identification for battery, charger, LED integral lamps and remotes
- Self-Testing monthly and annual for 90 minutes
- Manual testing for 30 second, 15 minute and 90 minutes

Single Carton Weight: 1 lbs.
Master Carton Quantity: 12 each

