

GROUNDING

Ground Clamps

Heavy Duty Direct Burial with Lay-In Lugs

GLC Series





SPECIFICATIONS


- cULus Listed 467 Grounding & Bonding.
- UL467 Listed, Grounding & Bonding.
- Application: UL Listed for direct burial in earth and concrete, it can be used with rebar, copper water pipe, copper tubing and ground rods up to 1 inch in diameter.

FEATURES

- The ultimate ground clamp for large ground wires.
- This incredible ground clamp can handle just about any size ground wire and just about any application.
- Lay-in feature provides for the ultimate in flexibility.
- Convenient and pre-assembled screws are 304 stainless steel.

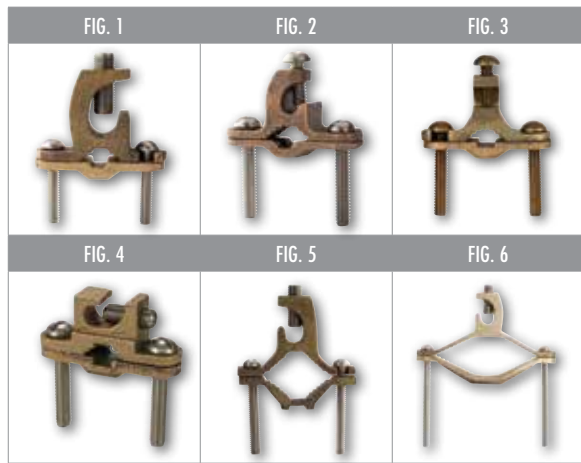

GLC-12 DB



GLC-140 DB

| CAT. NO. | FIG. NO. | CERTIFICATION | PIPE SIZE (IPS) (IN.) | GROUND WIRE RANGE | REBAR SIZE (IN.) | GROUND ROD SIZE (IN.) | LENGTH (L) (IN.) | WIDTH (W) (IN.) | HEIGHT (H) (IN.) | STD. CTN. QTY. |
|-----------|----------|---------------|-----------------------|-------------------|------------------|-----------------------|------------------|-----------------|------------------|----------------|
| GLC-140DB | 1 | cULus | 1/2-1 | 8 STR-4/0 STR | 3/8-1 | 1/2-1 | 2.551 | 0.784 | 2.132 | 10 |
| GLC-12DB | 2 | UL | 1/2-1 | #10-2 STR | 3/8-1 | 1/2-1 | 2.281 | 0.714 | 1.382 | 25 |
| GLC-12RDB | 3 | UL | 1/2-1 | #10-2 STR | 3/8-1 | 1/2-1 | 2.283 | 0.670 | 1.385 | 25 |
| GLC-12HDB | 4 | UL | 1/2-1 | #10-2 STR | 3/8-1 | 1/2-1 | 2.362 | 0.708 | 1.200 | 25 |
| GLC-240DB | 5 | cULus | 1 1/4-2 | #8-4/0 STR | - | - | 3.319 | 0.693 | 3.190 | 6 |
| GLC-440DB | 6 | cULus | 2 1/2-4 | #8-4/0 STR | - | - | 5.688 | 0.823 | 3.743 | 3 |



Scan QR code
for mobile access to
Grounding drawings.

GROUNDING

Ground Clamps

Heavy Duty Direct Burial with Lay-In Lugs

GLC Series





SPECIFICATIONS


- cULus Listed 467 Grounding & Bonding.
- UL467 Listed, Grounding & Bonding.
- Application: UL Listed for direct burial in earth and concrete, it can be used with rebar, copper water pipe, copper tubing and ground rods up to 1 inch in diameter.

FEATURES

- The ultimate ground clamp for large ground wires.
- This incredible ground clamp can handle just about any size ground wire and just about any application.
- Lay-in feature provides for the ultimate in flexibility.
- Convenient and pre-assembled screws are 304 stainless steel.

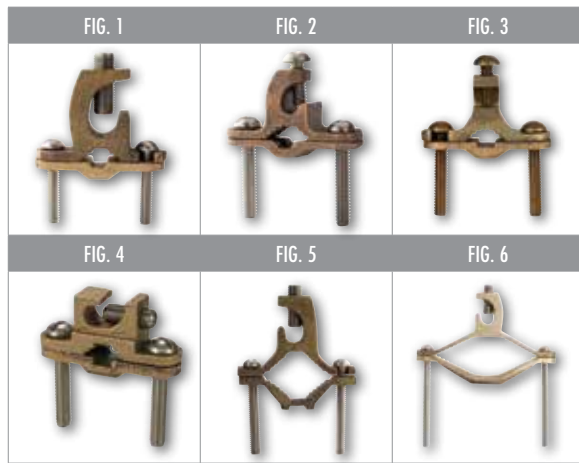

GLC-12 DB



GLC-140 DB

| CAT. NO. | FIG. NO. | CERTIFICATION | PIPE SIZE (IPS) (IN.) | GROUND WIRE RANGE | REBAR SIZE (IN.) | GROUND ROD SIZE (IN.) | LENGTH (L) (IN.) | WIDTH (W) (IN.) | HEIGHT (H) (IN.) | STD. CTN. QTY. |
|-----------|----------|---------------|-----------------------|-------------------|------------------|-----------------------|------------------|-----------------|------------------|----------------|
| GLC-140DB | 1 | cULus | 1/2-1 | 8 STR-4/0 STR | 3/8-1 | 1/2-1 | 2.551 | 0.784 | 2.132 | 10 |
| GLC-12DB | 2 | UL | 1/2-1 | #10-2 STR | 3/8-1 | 1/2-1 | 2.281 | 0.714 | 1.382 | 25 |
| GLC-12RDB | 3 | UL | 1/2-1 | #10-2 STR | 3/8-1 | 1/2-1 | 2.283 | 0.670 | 1.385 | 25 |
| GLC-12HDB | 4 | UL | 1/2-1 | #10-2 STR | 3/8-1 | 1/2-1 | 2.362 | 0.708 | 1.200 | 25 |
| GLC-240DB | 5 | cULus | 1 1/4-2 | #8-4/0 STR | - | - | 3.319 | 0.693 | 3.190 | 6 |
| GLC-440DB | 6 | cULus | 2 1/2-4 | #8-4/0 STR | - | - | 5.688 | 0.823 | 3.743 | 3 |



Scan QR code for mobile access to Grounding drawings.