

A. System Overview

P1™ Military Grade Continuous Heat Shrink Label Cassettes for PanTher™ LS8E or Cougar™ LS9 Hand-Held Thermal Transfer Printers

B1. Cable Ties

- P1™ Label Cassette contains an integrated memory device for automatic formatting, recall of last legend used, and number of labels remaining in the cassette
- Fast loading label cassette includes both label material and ribbon to make changing labels easy

- Meets print performance requirements of MIL-M-81531 and MIL-STD-202F Method 215A, Solution A, C, and D
- Meets UL Standard 224 for flammability
- Shrink ratio 3:1
- Each cassette contains a continuous roll of non-adhesive flattened polyolefin that can be cut-to-length

B2. Cable Accessories

B3. Stainless Steel Ties




C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

Part Number System for Wire/Cable Labeling

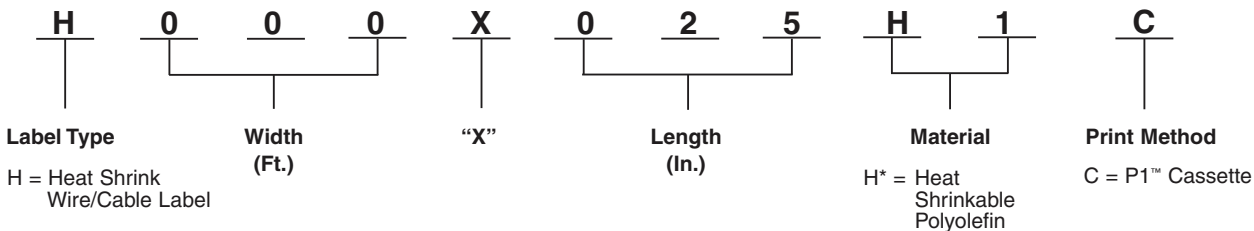

C4. Cable Management

D1. Terminals

Material/Print Method Selection Chart

| Material | Print Method | Temperature Range | Features |
|--|--------------|---------------------------------|---|
| Heat Shrinkable Polyolefin, White (H*) | P1™ Cassette | -67°F to 275°F (-55°C to 135°C) | Durable flattened polyolefin, high quality heat shrink wire/cable labels. |

D2. Power Connectors

D3. Grounding Connectors

| Part Number | Part Description | Width | | Length | | Min. Cable Diameter | | Max. Cable Diameter | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--------------------|---|-------|------|--------|-----|---------------------|-----|---------------------|------|----------------|----------------|
| | | In. | mm | Ft. | m | In. | mm | In. | mm | | |
| H000X025H1C | White, 1/8" diameter heat shrinkable polyolefin, 22 – 16 AWG. | 0.25 | 6.4 | 8.0 | 2.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 | 10 |
| H000X025H2C | Yellow, 1/8" diameter heat shrinkable polyolefin, 22 – 16 AWG. | 0.25 | 6.4 | 8.0 | 2.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 | 10 |
| H000X034H1C | White, 3/16" diameter heat shrinkable polyolefin, 18 – 12 AWG. | 0.34 | 8.6 | 8.0 | 2.4 | 0.06 | 1.5 | 0.19 | 4.8 | 1 | 10 |
| H000X034H2C | Yellow, 3/16" diameter heat shrinkable polyolefin, 18 – 12 AWG. | 0.34 | 8.6 | 8.0 | 2.4 | 0.06 | 1.5 | 0.19 | 4.8 | 1 | 10 |
| H000X044H1C | White, 1/4" diameter heat shrinkable polyolefin, 16 – 10 AWG. | 0.44 | 11.2 | 6.0 | 1.8 | 0.08 | 2.0 | 0.25 | 6.4 | 1 | 10 |
| H000X044H2C | Yellow, 1/4" diameter heat shrinkable polyolefin, 16 – 10 AWG. | 0.44 | 11.2 | 6.0 | 1.8 | 0.08 | 2.0 | 0.25 | 6.4 | 1 | 10 |
| H000X064H1C | White, 3/8" diameter heat shrinkable polyolefin, 12 – 6 AWG. | 0.64 | 16.3 | 6.0 | 1.8 | 0.13 | 3.3 | 0.38 | 9.7 | 1 | 10 |
| H000X064H2C | Yellow, 3/8" diameter heat shrinkable polyolefin, 12 – 6 AWG. | 0.64 | 16.3 | 6.0 | 1.8 | 0.13 | 3.3 | 0.38 | 9.7 | 1 | 10 |
| H000X084H1C | White, 1/2" diameter heat shrinkable polyolefin, 8 – 1 AWG. | 0.84 | 21.3 | 6.0 | 1.8 | 0.17 | 4.3 | 0.50 | 12.7 | 1 | 10 |
| H000X084H2C | Yellow, 1/2" diameter heat shrinkable polyolefin, 8 – 1 AWG. | 0.84 | 21.3 | 6.0 | 1.8 | 0.17 | 4.3 | 0.50 | 12.7 | 1 | 10 |

Order number of cassettes required.

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

A. System Overview

P1™ Military Grade Continuous Heat Shrink Label Cassettes for PanTher™ LS8E or Cougar™ LS9 Hand-Held Thermal Transfer Printers

B1. Cable Ties

- P1™ Label Cassette contains an integrated memory device for automatic formatting, recall of last legend used, and number of labels remaining in the cassette
- Fast loading label cassette includes both label material and ribbon to make changing labels easy

- Meets print performance requirements of MIL-M-81531 and MIL-STD-202F Method 215A, Solution A, C, and D
- Meets UL Standard 224 for flammability
- Shrink ratio 3:1
- Each cassette contains a continuous roll of non-adhesive flattened polyolefin that can be cut-to-length

B2. Cable Accessories

B3. Stainless Steel Ties




C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

Part Number System for Wire/Cable Labeling

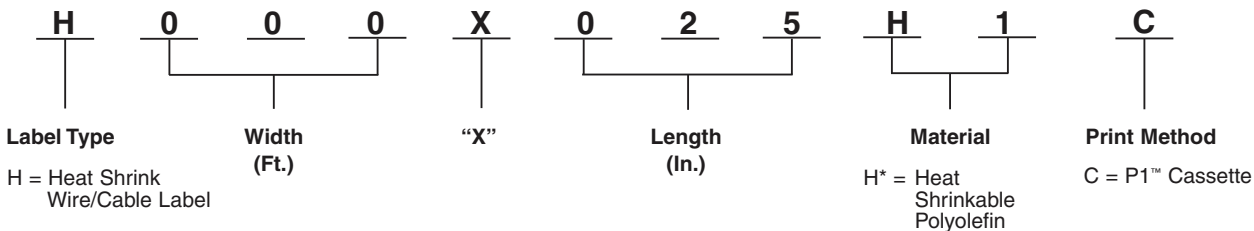

C4. Cable Management

D1. Terminals

D2. Power Connectors

Material/Print Method Selection Chart

| Material | Print Method | Temperature Range | Features |
|--|--------------|---------------------------------|---|
| Heat Shrinkable Polyolefin, White (H*) | P1™ Cassette | -67°F to 275°F (-55°C to 135°C) | Durable flattened polyolefin, high quality heat shrink wire/cable labels. |

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

| Part Number | Part Description | Width | | Length | | Min. Cable Diameter | | Max. Cable Diameter | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--------------------|---|-------|------|--------|-----|---------------------|-----|---------------------|------|----------------|----------------|
| | | In. | mm | Ft. | m | In. | mm | In. | mm | | |
| H000X025H1C | White, 1/8" diameter heat shrinkable polyolefin, 22 – 16 AWG. | 0.25 | 6.4 | 8.0 | 2.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 | 10 |
| H000X025H2C | Yellow, 1/8" diameter heat shrinkable polyolefin, 22 – 16 AWG. | 0.25 | 6.4 | 8.0 | 2.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 | 10 |
| H000X034H1C | White, 3/16" diameter heat shrinkable polyolefin, 18 – 12 AWG. | 0.34 | 8.6 | 8.0 | 2.4 | 0.06 | 1.5 | 0.19 | 4.8 | 1 | 10 |
| H000X034H2C | Yellow, 3/16" diameter heat shrinkable polyolefin, 18 – 12 AWG. | 0.34 | 8.6 | 8.0 | 2.4 | 0.06 | 1.5 | 0.19 | 4.8 | 1 | 10 |
| H000X044H1C | White, 1/4" diameter heat shrinkable polyolefin, 16 – 10 AWG. | 0.44 | 11.2 | 6.0 | 1.8 | 0.08 | 2.0 | 0.25 | 6.4 | 1 | 10 |
| H000X044H2C | Yellow, 1/4" diameter heat shrinkable polyolefin, 16 – 10 AWG. | 0.44 | 11.2 | 6.0 | 1.8 | 0.08 | 2.0 | 0.25 | 6.4 | 1 | 10 |
| H000X064H1C | White, 3/8" diameter heat shrinkable polyolefin, 12 – 6 AWG. | 0.64 | 16.3 | 6.0 | 1.8 | 0.13 | 3.3 | 0.38 | 9.7 | 1 | 10 |
| H000X064H2C | Yellow, 3/8" diameter heat shrinkable polyolefin, 12 – 6 AWG. | 0.64 | 16.3 | 6.0 | 1.8 | 0.13 | 3.3 | 0.38 | 9.7 | 1 | 10 |
| H000X084H1C | White, 1/2" diameter heat shrinkable polyolefin, 8 – 1 AWG. | 0.84 | 21.3 | 6.0 | 1.8 | 0.17 | 4.3 | 0.50 | 12.7 | 1 | 10 |
| H000X084H2C | Yellow, 1/2" diameter heat shrinkable polyolefin, 8 – 1 AWG. | 0.84 | 21.3 | 6.0 | 1.8 | 0.17 | 4.3 | 0.50 | 12.7 | 1 | 10 |

Order number of cassettes required.