


Nylon Fully Insulated Male Disconnects

Drawn - SD
Approved - KM
Material - Brass / Nylon Insulation
Title - Nylon Fully Insulated Male Disconnects

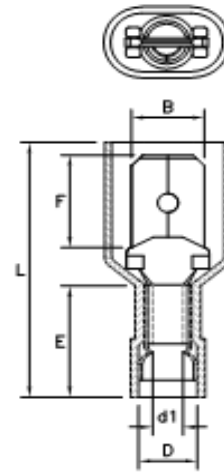

Part Number	Wire Range	Insulated Color	Electrical Rating Max	B	F	L	E	D	d1
IM22-250-3N	22-18 AWG	RED	105C / 600V	0.2499	0.3110	0.9251	0.4133	0.1653	0.0669
IM16-250-3N	16-14 AWG	BLUE	105C / 600V	0.2499	0.3110	0.9251	0.4133	0.1929	0.0905
IM12-250-3N	12-10 AWG	YELLOW	105C / 600V	0.2499	0.3110	1.0629	0.5118	0.2559	0.1338


Nylon Fully Insulated Male Disconnects

Drawn - SD

Approved - KM

Material - Brass / Nylon Insulation

Title - Nylon Fully Insulated Male Disconnects

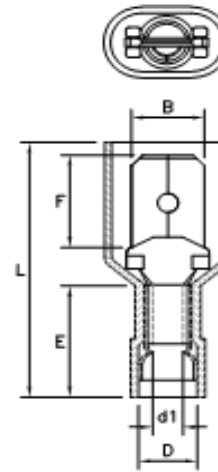

Part Number	Wire Range	Insulated Color	Electrical Rating Max	B	F	L	E	D	d1
IM22-250-3N	22-18 AWG	RED	105C / 600V	0.2499	0.3110	0.9251	0.4133	0.1653	0.0669
IM16-250-3N	16-14 AWG	BLUE	105C / 600V	0.2499	0.3110	0.9251	0.4133	0.1929	0.0905
IM12-250-3N	12-10 AWG	YELLOW	105C / 600V	0.2499	0.3110	1.0629	0.5118	0.2559	0.1338