

# Electrical Accessories – Network Wiring Connectivity

## Patch Panels, 66 Block & Patch Cords



Pass & Seymour

### Patch Panels

High-performance panels meet the TIA/EIA-568-B.2 standard for connecting hardware, including Addendum 1 for Cat 6 component performance.

#### Category 6

| CATALOG NUMBER | DESCRIPTION                      | DIMENSIONS  | RACK UNITS |
|----------------|----------------------------------|-------------|------------|
| 24845CC6       | 24-Port T568A/B Universal Wiring | 19" x 1.75" | 1          |
| 48845CC6       | 48-Port T568A/B Universal Wiring | 19" x 3.50" | 2          |

#### Category 5e

| CATALOG NUMBER | DESCRIPTION                      | DIMENSIONS  | RACK UNITS |
|----------------|----------------------------------|-------------|------------|
| 24845C5E       | 24-Port T568A/B Universal Wiring | 19" x 1.75" | 1          |
| 48845C5E       | 48-Port T568A/B Universal Wiring | 19" x 3.50" | 2          |

Dimensions shown are W x H.  
One Rack Unit = 1.75" H.

#### Category 5e Modular IDC Wall-Mount Jack Panels with Stand-Off Legs

| CATALOG NUMBER | DESCRIPTION                     | DIMENSIONS             |
|----------------|---------------------------------|------------------------|
| JP12845C5E     | 12-Port T568A/ Universal Wiring | 10.69" x 3.46" x 3.08" |
| JP24845C5E     | 24-Port T568A/ Universal Wiring | 10.69" x 3.46" x 3.08" |
| JP36845C5E     | 36-Port T568A/ Universal Wiring | 10.69" x 6.94" x 3.08" |

#### Category 5e Wall-Mount Patch Panel with 89D Bracket

| CATALOG NUMBER | DESCRIPTION                      | DIMENSIONS           |
|----------------|----------------------------------|----------------------|
| 12845C5E89     | 12-Port T568A/B Universal Wiring | 2.25" x 10" x 1.625" |

Dimensions shown are W x H x D.



48845CC6



JP24845C5E




12845C5E89

### 66 Block

Provides flexibility in network interface connections. Used primarily for cross-connections, 66 blocks provide easy connections between customer voice or data networks and telecommunications equipment.

#### 66 Block & Bracket

| CATALOG NUMBER | DESCRIPTION                                  |
|----------------|----------------------------------------------|
| PS665089V      | 50-Pair 66 Block, Unwired & Mounting Bracket |



PS665089V\*

\*Block and bracket pictured separately, product sold together as one catalog number.

### Patch Cords

Stranded-wire, twisted-pair construction provides the flexibility to make Cross-connections easy.

| CATALOG NUMBER | DESCRIPTION               | AVAILABLE LENGTHS    |
|----------------|---------------------------|----------------------|
| PCC6_          | Category 6, Gray          | 3', 5', 7', 10', 15' |
| PSPC5B_        | Category 5e Booted, White | 3', 5', 7', 10', 15' |

Add desired length to end of Catalog Number to order, example PCC610.



PSPC5B7 PSPC5B5

# Electrical Accessories – Network Wiring Connectivity

## Patch Panels, 66 Block & Patch Cords



Pass & Seymour

### Patch Panels

High-performance panels meet the TIA/EIA-568-B.2 standard for connecting hardware, including Addendum 1 for Cat 6 component performance.

#### Category 6

| CATALOG NUMBER | DESCRIPTION                      | DIMENSIONS  | RACK UNITS |
|----------------|----------------------------------|-------------|------------|
| 24845CC6       | 24-Port T568A/B Universal Wiring | 19" x 1.75" | 1          |
| 48845CC6       | 48-Port T568A/B Universal Wiring | 19" x 3.50" | 2          |

#### Category 5e

| CATALOG NUMBER | DESCRIPTION                      | DIMENSIONS  | RACK UNITS |
|----------------|----------------------------------|-------------|------------|
| 24845C5E       | 24-Port T568A/B Universal Wiring | 19" x 1.75" | 1          |
| 48845C5E       | 48-Port T568A/B Universal Wiring | 19" x 3.50" | 2          |

Dimensions shown are W x H.  
One Rack Unit = 1.75" H.

#### Category 5e Modular IDC Wall-Mount Jack Panels with Stand-Off Legs

| CATALOG NUMBER | DESCRIPTION                     | DIMENSIONS             |
|----------------|---------------------------------|------------------------|
| JP12845C5E     | 12-Port T568A/ Universal Wiring | 10.69" x 3.46" x 3.08" |
| JP24845C5E     | 24-Port T568A/ Universal Wiring | 10.69" x 3.46" x 3.08" |
| JP36845C5E     | 36-Port T568A/ Universal Wiring | 10.69" x 6.94" x 3.08" |

#### Category 5e Wall-Mount Patch Panel with 89D Bracket

| CATALOG NUMBER | DESCRIPTION                      | DIMENSIONS           |
|----------------|----------------------------------|----------------------|
| 12845C5E89     | 12-Port T568A/B Universal Wiring | 2.25" x 10" x 1.625" |

Dimensions shown are W x H x D.



48845CC6



JP24845C5E




12845C5E89

### 66 Block

Provides flexibility in network interface connections. Used primarily for cross-connections, 66 blocks provide easy connections between customer voice or data networks and telecommunications equipment.

#### 66 Block & Bracket

| CATALOG NUMBER | DESCRIPTION                                  |
|----------------|----------------------------------------------|
| PS665089V      | 50-Pair 66 Block, Unwired & Mounting Bracket |

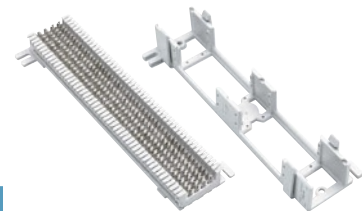

PS665089V\*

\*Block and bracket pictured separately, product sold together as one catalog number.

### Patch Cords

Stranded-wire, twisted-pair construction provides the flexibility to make Cross-connections easy.

| CATALOG NUMBER | DESCRIPTION               | AVAILABLE LENGTHS    |
|----------------|---------------------------|----------------------|
| PCC6_          | Category 6, Gray          | 3', 5', 7', 10', 15' |
| PSPC5B_        | Category 5e Booted, White | 3', 5', 7', 10', 15' |

Add desired length to end of Catalog Number to order, example PCC610.



PSPC5B7 PSPC5B5