# PASS & SEYMOUR®
radiant® 15W USB
Charging Receptacles 15A, 125V



## Conveniently power mobile devices quickly and reliably without the need for bulky AC adapters.

R26USBAC6, R26USBCC6


Charge phones, tablets and more with USB Outlets from the radiant® Collection. With 15W of power supplying the included USB Type-A and USB Type-C connections, this outlet helps you get that full battery feeling with convenience and speed – no bulky adapters needed. Easily replacing traditional outlets in as little as ten minutes, this USB updates your space with advanced functionality and the sleek, clean lines of radiant for a sophisticated look. Made exclusively for use with screwless Wall Plates from the radiant® Collection, sold separately.

## Features & Benefits

**Combination AC USB receptacles** include two 5-volt DC USB ports that work with USB 2.0 & 3.0 compatible devices.

**Posted side-wire terminal screws and external back-wire pressure plates** for faster termination.

**Available with (1) USB Type-A & (1) USB Type-C port or (2) USB Type-C ports** to charge the latest mobile devices.

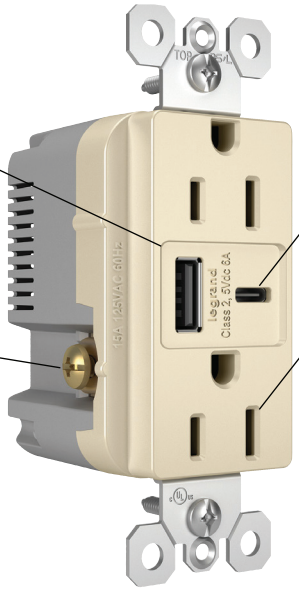

**R26USBAC6LA**

**Type-A and Type-C ports carry minimum rating of 10,000 insertions.**

**AC USB receptacles are tamper-resistant** to meet NEC. Patented shutter system — now with black "invisi-shutters" for an invisible effect preferred by end users — helps prevent improper insertion of foreign objects.

**Slim design** allows for installation in standard-depth wall boxes.

- **15W of charging capacity** with smart currentsharing technology to allow for full 3A through a singular Type-C port.
- **AC USB receptacles available in 15A, 125V.**
- **Back and side wire termination options** accommodate #14 AWG – #10 AWG stranded and solid copper wire.
- **Multiple color options available.**

## 3rd Party Compliance

cULus listed, UL listed. Complies with test requirements UL 498, UL 1310
CSA C22.2 No. 42, CSA c22.2 No. 223


## Technical Information

### Performance


| | |
|---|---|
| **Electrical** | |
| Dielectric Withstand Voltage | Withstands 1500V minimum |
| Maximum Working Voltage | 125V |
| Current Interrupting | Certified for current interrupting at full-rated current (receptacle only) |
| Maximum Temperature Rise | 30°C after 50 cycles at full-rated current after 50 cycles of overload are 150% of rated current with direct current |
| No-Load Power Draw | 10.7 mW Meets Department of Energy (DoE) Level VI requirement |
| FCC Part 15 | Class B |
| **Mechanical** | |
| Terminal Accommodation | Back and side wire termination options accommodate #14 AWG - #10 AWG stranded and solid copper wire. |
| Product Identification | Ratings are a permanent part of the device |
| **Environmental** | |
| Flammability | UL94 V2 (for device cover) 5V (for device body and frame) |
| Operating Temperature | Maximum continuous +60°C, minimum -40°C without impact |
| RoHS | Compliant |

### Materials

| | |
|---|---|
| Face | Polycarbonate |
| Back Body | Nylon |
| Line Contacts | CDA 260 Brass |
| Mounting Strap | .049" Zinc-Plated Steel |
| Terminal Screws | Tri-Drive Zinc-Plated Steel with Either Clear or Black Chromate for Color Identification |
| Ground Screw | Tri-Drive Steel with Green Chromate |
| Mounting Screws | Tri-Drive Steel |

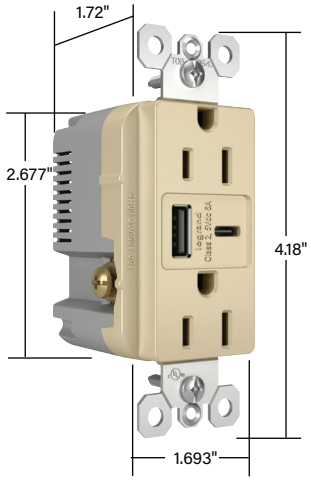


**R26USBAC6I**

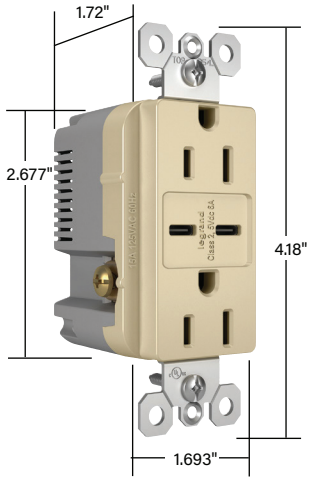


**R26USBCC6I**

### Warranty

1 Year

## Ordering Information

### 15W USB Type AC Chargers with Duplex Tamper-Resistant Receptacles

| | Rating | | | Charging Capacity | | 3rd Party Compliance | | |
|---|---|---|---|---|---|---|---|---|
| Catalog Number | A | V | Color | Wattage | Amperage/ Output | UL498 UL1310 | | C22.2 No. 42 C22.2 No. 223 |
| **R26USBAC6BK** | 15 | 125 | Black | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6DBCCV4** | 15 | 125 | Dark Bronze | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6I** | 15 | 125 | Ivory | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6LA** | 15 | 125 | Light Almond | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6NICC6** | 15 | 125 | Nickel | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6W** | 15 | 125 | White | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |

### 15W USB Type CC Chargers with Duplex Tamper-Resistant Receptacles

| | Rating | | | Charging Capacity | | 3rd Party Compliance | | |
|---|---|---|---|---|---|---|---|---|
| Catalog Number | A | V | Color | Wattage | Amperage/ Output | UL498 UL1310 | | C22.2 No. 42 C22.2 No. 223 |
| **R26USBCC6BK** | 15 | 125 | Black | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6DBCCV4** | 15 | 125 | Dark Bronze | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6I** | 15 | 125 | Ivory | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6LA** | 15 | 125 | Light Almond | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6NICCV6** | 15 | 125 | Nickel | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6W** | 15 | 125 | White | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |




**NEMA 5-15R**

## Vertical Markets

- **Residential**
- **Multiple Dwelling**
- **Hospitality/Lodging**

## Also available in the radiant® collection...

- **GFCI Receptacles**
- **Standard & Tamper-Resistant Receptacles**
- **Paddle Switches**
- **Lighting & Fan Controls**
- **Timers**
- **Combination Devices**
- **Adjustable Night Lights**
- **Screwless Wall Plates**
- **Sensors**
- **Home Automation Controls**
- **Wireless Qi & USB charging receptacles**

The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.

**Legrand, North America**
60 Woodlawn Street West
Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us
905.738.9195
www.legrand.ca

FOLLOW US

CS3482 — October 2026 — For latest specs visit www.legrand.us/radiant

© Copyright 2026 Legrand All Rights Reserved

# PASS & SEYMOUR®
radiant® 15W USB
Charging Receptacles 15A, 125V



## Conveniently power mobile devices quickly and reliably without the need for bulky AC adapters.

R26USBAC6, R26USBCC6


Charge phones, tablets and more with USB Outlets from the radiant® Collection. With 15W of power supplying the included USB Type-A and USB Type-C connections, this outlet helps you get that full battery feeling with convenience and speed – no bulky adapters needed. Easily replacing traditional outlets in as little as ten minutes, this USB updates your space with advanced functionality and the sleek, clean lines of radiant for a sophisticated look. Made exclusively for use with screwless Wall Plates from the radiant® Collection, sold separately.

## Features & Benefits

**Combination AC USB receptacles** include two 5-volt DC USB ports that work with USB 2.0 & 3.0 compatible devices.

**Posted side-wire terminal screws and external back-wire pressure plates** for faster termination.

**Available with (1) USB Type-A & (1) USB Type-C port or (2) USB Type-C ports** to charge the latest mobile devices.

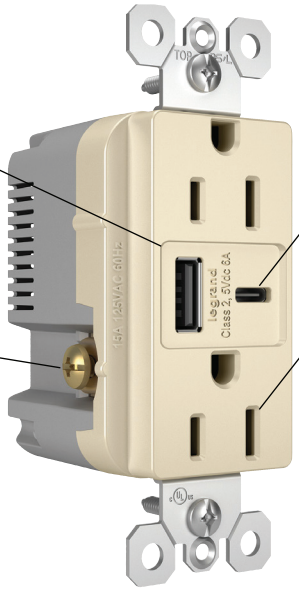

**R26USBAC6LA**

**Type-A and Type-C ports carry minimum rating of 10,000 insertions.**

**AC USB receptacles are tamper-resistant** to meet NEC. Patented shutter system — now with black "invisi-shutters" for an invisible effect preferred by end users — helps prevent improper insertion of foreign objects.

**Slim design** allows for installation in standard-depth wall boxes.

- **15W of charging capacity** with smart currentsharing technology to allow for full 3A through a singular Type-C port.
- **AC USB receptacles available in 15A, 125V.**
- **Back and side wire termination options** accommodate #14 AWG – #10 AWG stranded and solid copper wire.
- **Multiple color options available.**

## 3rd Party Compliance

cULus listed, UL listed. Complies with test requirements UL 498, UL 1310
CSA C22.2 No. 42, CSA c22.2 No. 223


## Technical Information

### Performance


| | |
|---|---|
| **Electrical** | |
| Dielectric Withstand Voltage | Withstands 1500V minimum |
| Maximum Working Voltage | 125V |
| Current Interrupting | Certified for current interrupting at full-rated current (receptacle only) |
| Maximum Temperature Rise | 30°C after 50 cycles at full-rated current after 50 cycles of overload are 150% of rated current with direct current |
| No-Load Power Draw | 10.7 mW Meets Department of Energy (DoE) Level VI requirement |
| FCC Part 15 | Class B |
| **Mechanical** | |
| Terminal Accommodation | Back and side wire termination options accommodate #14 AWG - #10 AWG stranded and solid copper wire. |
| Product Identification | Ratings are a permanent part of the device |
| **Environmental** | |
| Flammability | UL94 V2 (for device cover) 5V (for device body and frame) |
| Operating Temperature | Maximum continuous +60°C, minimum -40°C without impact |
| RoHS | Compliant |

### Materials

| | |
|---|---|
| Face | Polycarbonate |
| Back Body | Nylon |
| Line Contacts | CDA 260 Brass |
| Mounting Strap | .049" Zinc-Plated Steel |
| Terminal Screws | Tri-Drive Zinc-Plated Steel with Either Clear or Black Chromate for Color Identification |
| Ground Screw | Tri-Drive Steel with Green Chromate |
| Mounting Screws | Tri-Drive Steel |

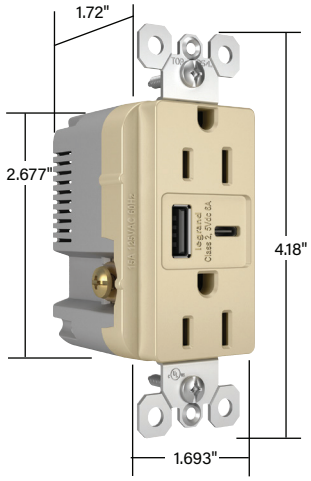


**R26USBAC6I**

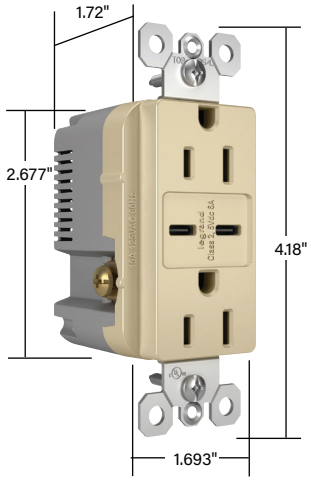


**R26USBCC6I**

### Warranty

1 Year

## Ordering Information

### 15W USB Type AC Chargers with Duplex Tamper-Resistant Receptacles

| | Rating | | | Charging Capacity | | 3rd Party Compliance | | |
|---|---|---|---|---|---|---|---|---|
| Catalog Number | A | V | Color | Wattage | Amperage/ Output | UL498 UL1310 | | C22.2 No. 42 C22.2 No. 223 |
| **R26USBAC6BK** | 15 | 125 | Black | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6DBCCV4** | 15 | 125 | Dark Bronze | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6I** | 15 | 125 | Ivory | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6LA** | 15 | 125 | Light Almond | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6NICC6** | 15 | 125 | Nickel | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBAC6W** | 15 | 125 | White | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |

### 15W USB Type CC Chargers with Duplex Tamper-Resistant Receptacles

| | Rating | | | Charging Capacity | | 3rd Party Compliance | | |
|---|---|---|---|---|---|---|---|---|
| Catalog Number | A | V | Color | Wattage | Amperage/ Output | UL498 UL1310 | | C22.2 No. 42 C22.2 No. 223 |
| **R26USBCC6BK** | 15 | 125 | Black | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6DBCCV4** | 15 | 125 | Dark Bronze | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6I** | 15 | 125 | Ivory | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6LA** | 15 | 125 | Light Almond | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6NICCV6** | 15 | 125 | Nickel | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |
| **R26USBCC6W** | 15 | 125 | White | 15W (per port) | 6A, 5V Output | ▪ | ▪ | ▪ |




**NEMA 5-15R**

## Vertical Markets

- **Residential**
- **Multiple Dwelling**
- **Hospitality/Lodging**

## Also available in the radiant® collection...

- **GFCI Receptacles**
- **Standard & Tamper-Resistant Receptacles**
- **Paddle Switches**
- **Lighting & Fan Controls**
- **Timers**
- **Combination Devices**
- **Adjustable Night Lights**
- **Screwless Wall Plates**
- **Sensors**
- **Home Automation Controls**
- **Wireless Qi & USB charging receptacles**

The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.

**Legrand, North America**
60 Woodlawn Street West
Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us
905.738.9195
www.legrand.ca

FOLLOW US

CS3482 — October 2026 — For latest specs visit www.legrand.us/radiant

© Copyright 2026 Legrand All Rights Reserved