

## Seoprene® 105 Black—Large Sizes



| PART NUMBER | DESCRIPTION | STRANDING    | NOMINAL INSULATION THICKNESS | NOMINAL JACKET THICKNESS | NOMINAL OD | AMPACITY | WT/M' |
|-------------|-------------|--------------|------------------------------|--------------------------|------------|----------|-------|
| 22320       | 8/3 SEOW    | 96/28        | .048                         | .095                     | .700       | 40       | 282   |
| 22420       | 8/4 SEOW    | 96/28        | .048                         | .100                     | .783       | 35       | 368   |
| 22470       | 8/5 SEOW    | 96/28        | .048                         | .100                     | .850       | 28       | 442   |
| 22321       | 6/3 SEOW    | 96/26        | .048                         | .100                     | .818       | 55       | 451   |
| 22421       | 6/4 SEOW    | 96/26        | .048                         | .100                     | .892       | 45       | 573   |
| 22521       | 6/5 SEOW    | 96/26        | .048                         | .110                     | .992       | 36       | 720   |
| 22322       | 4/3 SEOW    | 96/24        | .048                         | .110                     | .982       | 70       | 668   |
| 22422       | 4/4 SEOW    | 96/24        | .048                         | .125                     | 1.104      | 60       | 882   |
| 22552       | 4/5 SEOW    | 96/24        | .048                         | .125                     | 1.203      | 48       | 1091  |
| 22323       | 2/3 SEOW    | 7 X 17/.0223 | .050                         | .125                     | 1.158      | 95       | 932   |
| 22423       | 2/4 SEOW    | 7 X 17/.0223 | .050                         | .125                     | 1.267      | 80       | 1152  |
| 22553       | 2/5 SEOW    | 7 X 17/.0223 | .050                         | .135                     | 1.389      | 64       | 1414  |

UL constructions available

**Applications:** Heavy machine tools; compressors; portable tools; robotics; motor controls.

## Suprene™ 105 Yellow

For use in the toughest environments. Offers a temperature rating of -60°C to 105°C and 25% more abrasion resistance. Use on heavy-duty industrial applications where chemicals and/or abrasion present a problem. Safety yellow color provides high visibility.



| PART NUMBER | DESCRIPTION | STRANDING | NOMINAL INSULATION THICKNESS | NOMINAL JACKET THICKNESS | NOMINAL OD | AMPACITY | WT/M' |
|-------------|-------------|-----------|------------------------------|--------------------------|------------|----------|-------|
| 23345       | 18/3 SJEOW  | 16/30     | .031                         | .032                     | .318       | 10       | 52    |
| 23346       | 16/3 SJEOW  | 26/30     | .031                         | .032                     | .348       | 13       | 65    |
| 23446       | 16/4 SJEOW  | 26/30     | .031                         | .032                     | .376       | 10       | 76    |
| 23347       | 14/3 SJEOW  | 41/30     | .031                         | .032                     | .391       | 18       | 81    |
| 23447       | 14/4 SJEOW  | 41/30     | .031                         | .032                     | .418       | 15       | 103   |
| 23348       | 12/3 SJEOW  | 65/30     | .031                         | .047                     | .460       | 25       | 122   |
| 23349       | 10/3 SJEOW  | 104/30    | .031                         | .062                     | .599       | 30       | 216   |
| 22345       | 18/3 SEOW   | 16/30     | .031                         | .062                     | .388       | 10       | 69    |
| 22445       | 18/4 SEOW   | 16/30     | .031                         | .062                     | .407       | 7        | 78    |
| 22346       | 16/3 SEOW   | 26/30     | .031                         | .062                     | .414       | 13       | 80    |
| 22446       | 16/4 SEOW   | 26/30     | .031                         | .062                     | .446       | 10       | 96    |
| 22347       | 14/3 SEOW   | 41/30     | .031                         | .082                     | .556       | 18       | 149   |
| 22447       | 14/4 SEOW   | 41/30     | .031                         | .082                     | .591       | 15       | 180   |
| 22348       | 12/3 SEOW   | 65/30     | .031                         | .097                     | .635       | 25       | 197   |
| 22448       | 12/4 SEOW   | 65/30     | .031                         | .097                     | .674       | 20       | 240   |
| 22349       | 10/3 SEOW   | 104/30    | .031                         | .095                     | .695       | 30       | 257   |
| 22449       | 10/4 SEOW   | 104/30    | .031                         | .095                     | .735       | 25       | 313   |

**Applications:** Indoor and outdoor temporary power; wherever high visibility is needed for safety; high abrasion and chemical exposure.



**Seoprene®**

# Packaging Options

Coleman Cable offers four types of packaging options.

- Signa-Coil
- Reel-in-box
- Pull-out box (Rabbit pull)
- Reels


All provide fast and easy cable access. Kinks and twists are eliminated. You get tangle-free cable delivery each and every time. These durable, compact designs save on installation time while reducing waste and material costs. They can be easily stacked to save room.

\* Not all options are available for each product



## Coleman Cable Part Legend

XXXXXX-XX-XX



### Put-ups

| Put-ups                        | Code |
|--------------------------------|------|
| Reel, 250 ft                   | 04   |
| Reel, 500 ft                   | 05   |
| Reel, 1,000 ft                 | 06   |
| Reel-in-box, 1,000 ft          | 16   |
| RabbitPull™ Pull-Box, 500 ft   | 45   |
| RabbitPull™ Pull-Box, 1,000 ft | 46   |
| SignaCoil™ 500 ft              | 55   |
| SignaCoil™ 1,000 ft            | 56   |

### Colors

| Colors | Code | Colors      | Code |
|--------|------|-------------|------|
| White  | 01   | Pink        | 11   |
| Yellow | 02   | Purple      | 13   |
| Orange | 03   | Clear       | 18   |
| Red    | 04   | Fluorescent | 21   |
| Green  | 05   | Pink        | 21   |
| Blue   | 06   | Ivory       | 22   |
| Brown  | 07   | Natural     | 23   |
| Black  | 08   | Beige       | 33   |
| Gray   | 09   | Red Striped | 44   |
|        |      | CorraClad™  | 44   |



## Seoprene® 105 Black—Large Sizes



| PART NUMBER | DESCRIPTION | STRANDING    | NOMINAL INSULATION THICKNESS | NOMINAL JACKET THICKNESS | NOMINAL OD | AMPACITY | WT/M' |
|-------------|-------------|--------------|------------------------------|--------------------------|------------|----------|-------|
| 22320       | 8/3 SEOWW   | 96/28        | .048                         | .095                     | .700       | 40       | 282   |
| 22420       | 8/4 SEOWW   | 96/28        | .048                         | .100                     | .783       | 35       | 368   |
| 22470       | 8/5 SEOWW   | 96/28        | .048                         | .100                     | .850       | 28       | 442   |
| 22321       | 6/3 SEOWW   | 96/26        | .048                         | .100                     | .818       | 55       | 451   |
| 22421       | 6/4 SEOWW   | 96/26        | .048                         | .100                     | .892       | 45       | 573   |
| 22521       | 6/5 SEOWW   | 96/26        | .048                         | .110                     | .992       | 36       | 720   |
| 22322       | 4/3 SEOWW   | 96/24        | .048                         | .110                     | .982       | 70       | 668   |
| 22422       | 4/4 SEOWW   | 96/24        | .048                         | .125                     | 1.104      | 60       | 882   |
| 22552       | 4/5 SEOWW   | 96/24        | .048                         | .125                     | 1.203      | 48       | 1091  |
| 22323       | 2/3 SEOWW   | 7 X 17/.0223 | .050                         | .125                     | 1.158      | 95       | 932   |
| 22423       | 2/4 SEOWW   | 7 X 17/.0223 | .050                         | .125                     | 1.267      | 80       | 1152  |
| 22553       | 2/5 SEOWW   | 7 X 17/.0223 | .050                         | .135                     | 1.389      | 64       | 1414  |

UL constructions available

**Applications:** Heavy machine tools; compressors; portable tools; robotics; motor controls.

## Suprene™ 105 Yellow

For use in the toughest environments. Offers a temperature rating of -60°C to 105°C and 25% more abrasion resistance. Use on heavy-duty industrial applications where chemicals and/or abrasion present a problem. Safety yellow color provides high visibility.



| PART NUMBER | DESCRIPTION | STRANDING | NOMINAL INSULATION THICKNESS | NOMINAL JACKET THICKNESS | NOMINAL OD | AMPACITY | WT/M' |
|-------------|-------------|-----------|------------------------------|--------------------------|------------|----------|-------|
| 23345       | 18/3 SJEOOW | 16/30     | .031                         | .032                     | .318       | 10       | 52    |
| 23346       | 16/3 SJEOOW | 26/30     | .031                         | .032                     | .348       | 13       | 65    |
| 23446       | 16/4 SJEOOW | 26/30     | .031                         | .032                     | .376       | 10       | 76    |
| 23347       | 14/3 SJEOOW | 41/30     | .031                         | .032                     | .391       | 18       | 81    |
| 23447       | 14/4 SJEOOW | 41/30     | .031                         | .032                     | .418       | 15       | 103   |
| 23348       | 12/3 SJEOOW | 65/30     | .031                         | .047                     | .460       | 25       | 122   |
| 23349       | 10/3 SJEOOW | 104/30    | .031                         | .062                     | .599       | 30       | 216   |
| 22345       | 18/3 SEOWW  | 16/30     | .031                         | .062                     | .388       | 10       | 69    |
| 22445       | 18/4 SEOWW  | 16/30     | .031                         | .062                     | .407       | 7        | 78    |
| 22346       | 16/3 SEOWW  | 26/30     | .031                         | .062                     | .414       | 13       | 80    |
| 22446       | 16/4 SEOWW  | 26/30     | .031                         | .062                     | .446       | 10       | 96    |
| 22347       | 14/3 SEOWW  | 41/30     | .031                         | .082                     | .556       | 18       | 149   |
| 22447       | 14/4 SEOWW  | 41/30     | .031                         | .082                     | .591       | 15       | 180   |
| 22348       | 12/3 SEOWW  | 65/30     | .031                         | .097                     | .635       | 25       | 197   |
| 22448       | 12/4 SEOWW  | 65/30     | .031                         | .097                     | .674       | 20       | 240   |
| 22349       | 10/3 SEOWW  | 104/30    | .031                         | .095                     | .695       | 30       | 257   |
| 22449       | 10/4 SEOWW  | 104/30    | .031                         | .095                     | .735       | 25       | 313   |

**Applications:** Indoor and outdoor temporary power; wherever high visibility is needed for safety; high abrasion and chemical exposure.



**Seoprene®**



# Packaging Options

Coleman Cable offers four types of packaging options.


- Signa-Coil
- Reel-in-box
- Pull-out box (Rabbit pull)
- Reels

All provide fast and easy cable access. Kinks and twists are eliminated. You get tangle-free cable delivery each and every time. These durable, compact designs save on installation time while reducing waste and material costs. They can be easily stacked to save room.

\* Not all options are available for each product



## Coleman Cable Part Legend

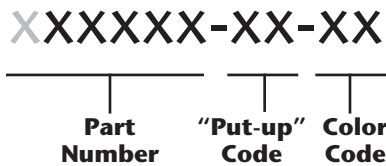

| Put-ups                        | Code |
|--------------------------------|------|
| Reel, 250 ft                   | 04   |
| Reel, 500 ft                   | 05   |
| Reel, 1,000 ft                 | 06   |
| Reel-in-box, 1,000 ft          | 16   |
| RabbitPull™ Pull-Box, 500 ft   | 45   |
| RabbitPull™ Pull-Box, 1,000 ft | 46   |
| SignaCoil™ 500 ft              | 55   |
| SignaCoil™ 1,000 ft            | 56   |

| Colors | Code |             | Code |
|--------|------|-------------|------|
| White  | 01   | Pink        | 11   |
| Yellow | 02   | Purple      | 13   |
| Orange | 03   | Clear       | 18   |
| Red    | 04   | Fluorescent |      |
| Green  | 05   | Pink        | 21   |
| Blue   | 06   | Ivory       | 22   |
| Brown  | 07   | Natural     | 23   |
| Black  | 08   | Beige       | 33   |
| Gray   | 09   | Red Striped |      |
|        |      | CorraClad™  | 44   |

